



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

8-Way Combiner/Divider

Model D5868

Frequency: 819-869 MHz

Power: 160 W CW




Insertion Loss: 0.8 dB Max.

VSWR: 1.30:1 Max.

Isolation: 60 dB Min.


Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.6 dB Max.

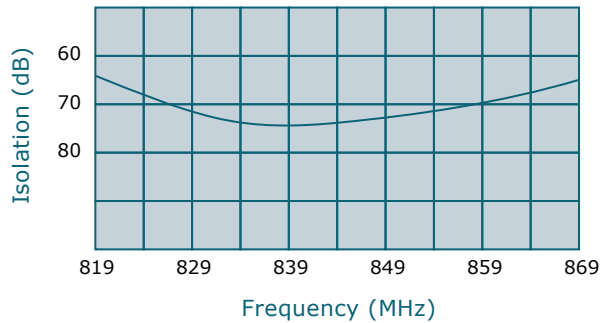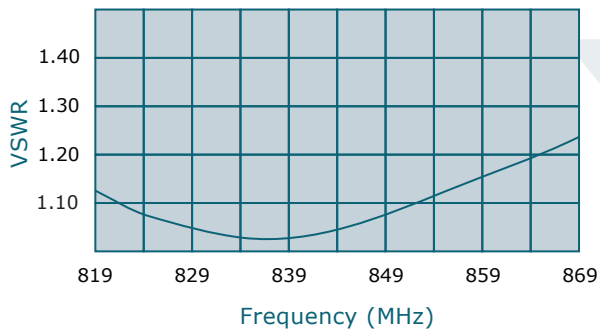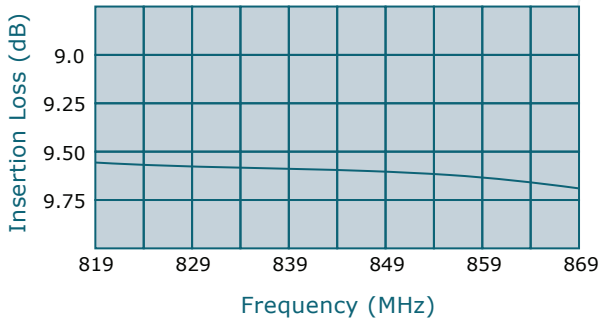

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J9 (Sum Port)	J1-J8 (Inputs/Outputs)
D5868-10	N Female	N Female
D5868-12	N Female	SMA
D5868-102	SMA	SMA

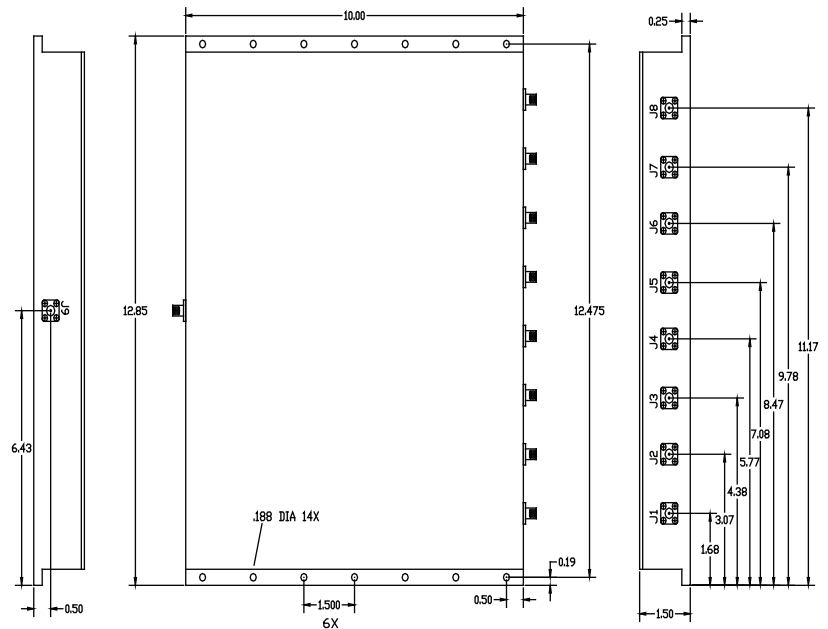

**Subject to change without notice

high power RF devices