



WERLATONE





SINCE 1965



Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

## 20 dB Bi-Directional Coupler

### Model C8356

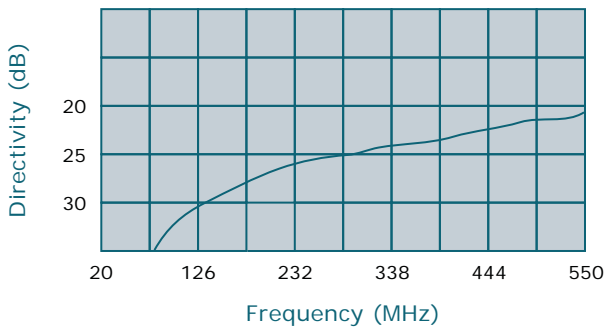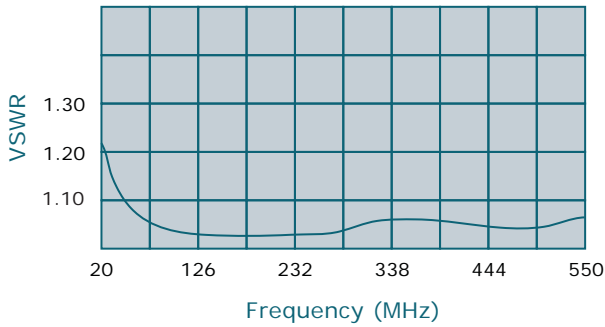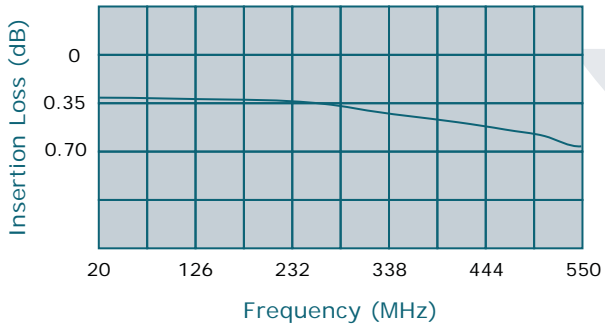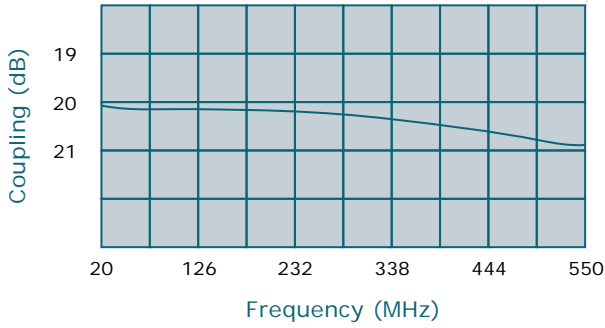

Frequency: 20 - 550 MHz

Power: 100 W CW

Coupling: 20 dB +/- 1.0 dB Nom.

Insertion Loss: 0.7 dB Max.



VSWR: 1.30:1 Max.

Flatness: +/- 1.0 dB Max.

Directivity: 20 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C8356-10	N Female	N Female
C8356-12	N Female	SMA
C8356-102	SMA	SMA

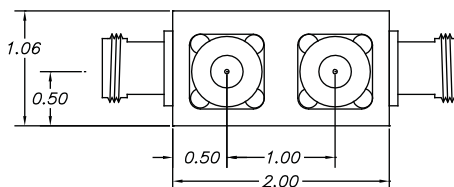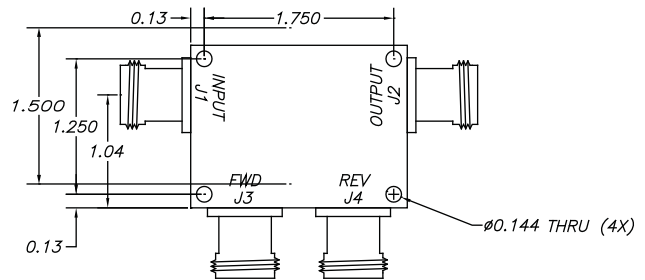

\*\*Subject to change without notice