



WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com



## 2-Way *Non-Isolated* Combiner/Divider

### Model D5877

Frequency: 150-1000 MHz




Power: 350 W CW

Insertion Loss: 0.50 dB Max.

VSWR: 1.30:1 Max.


Phase Balance: 5° Max.

Amplitude Balance: 0.25 dB Max.

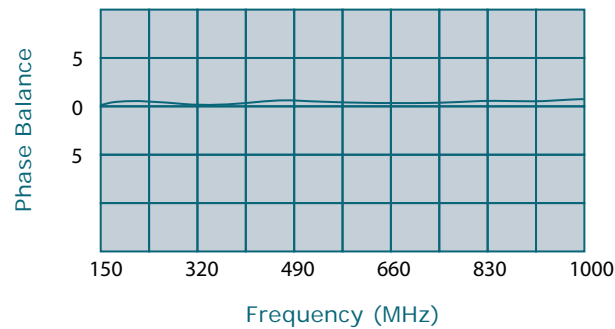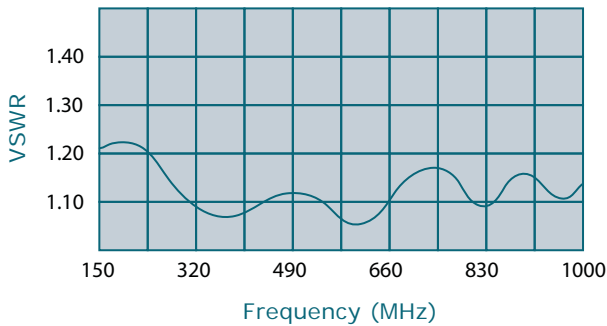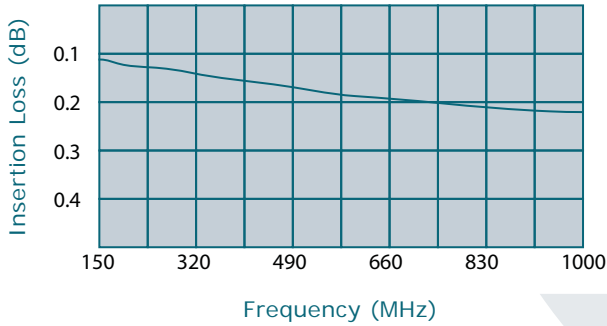

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J1 (Sum Port)	J2-J3 (Inputs/Outputs)
D5877-10	N Female	N Female
D5877-20	7/16 Female	N Female

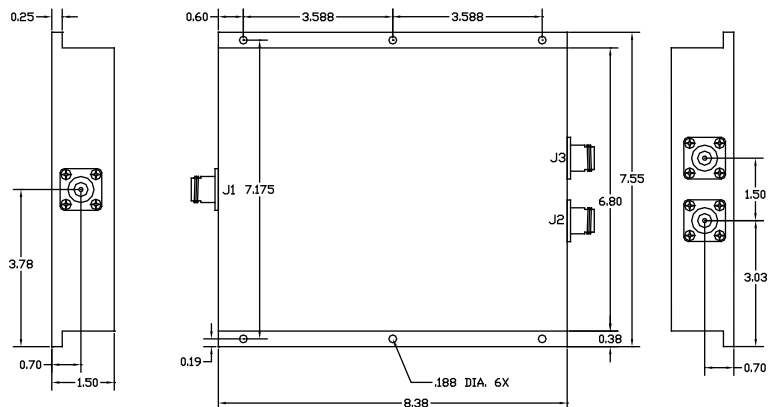

\*\*Subject to change without notice

high power RF devices