WERLATONE | SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

2-Way Combiner/Divider

Model D8544W

Frequency: 20-1000 MHz

Power: 100 W CW

10W/Input (Non-Coherent)

Insertion Loss: 0.50 dB Max.

VSWR: 1.35:1 Max.

Isolation: 18 dB Min.

Phase Balance: 3 Deg. Max.

Amplitude Balance: 0.35 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.
- Watertight Design

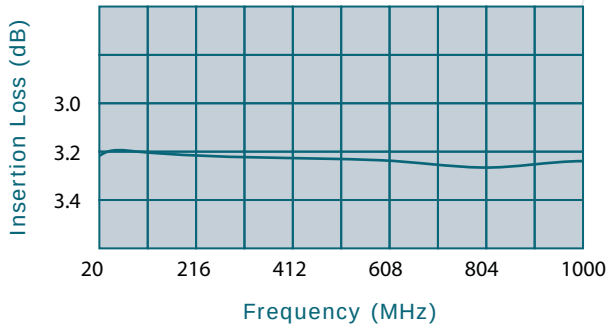

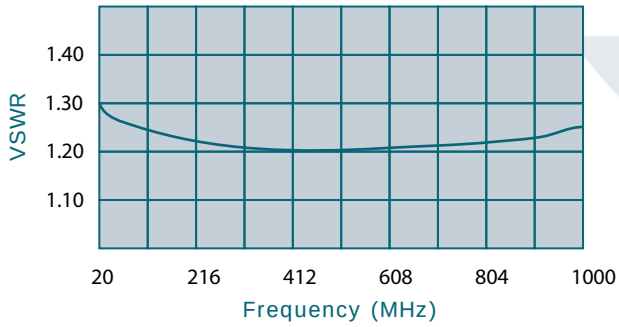

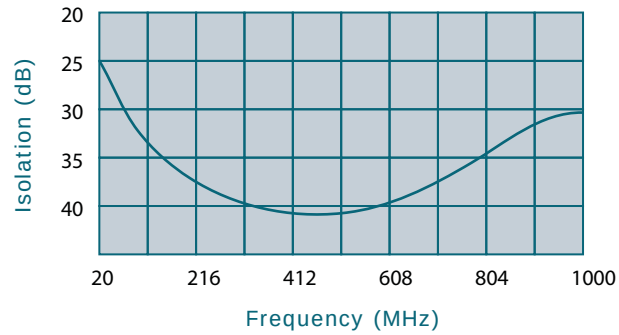

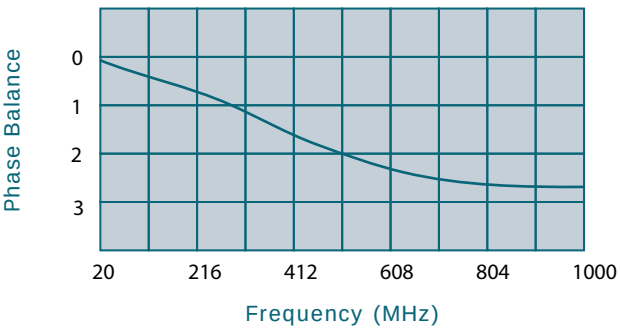

Connector Configurations		
Model	J1 (Sum Port)	J2-J3 (Inputs)
D8544W-10	N Female	N Female
D8544W-12	N Female	SMA
D8544W-102	SMA	SMA
D8544W-300	TNC	TNC

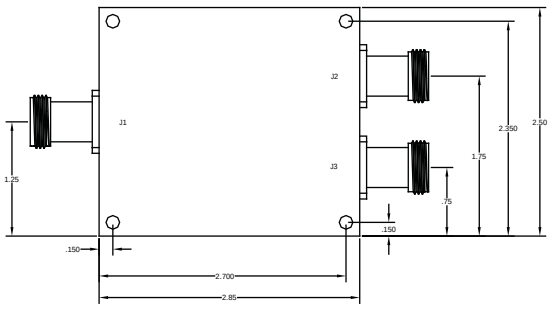



high power RF devices

**Subject to change without notice