



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



2-Way 90° Hybrid Coupler

Model QH8600

Frequency: 30 - 520 MHz

Power: 250 W CW





Insertion Loss: 0.85 dB Max.

VSWR: 1.50:1 Max.

Isolation: 17 dB Min.

Phase Balance: 90° ± 6° Max.

Amplitude Balance: ± 1.25 dB Max.

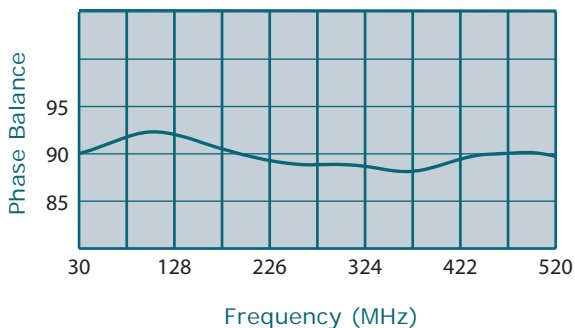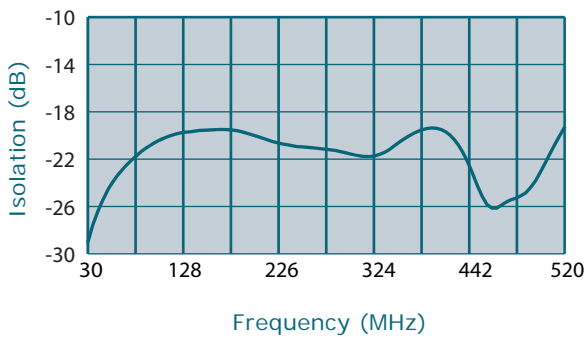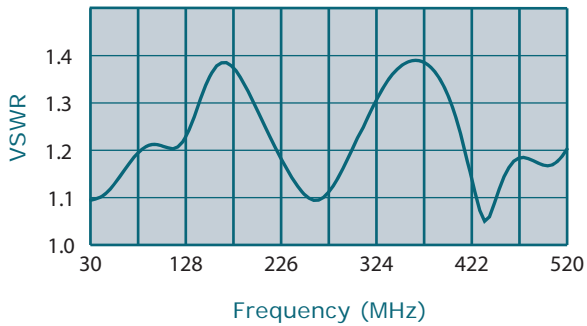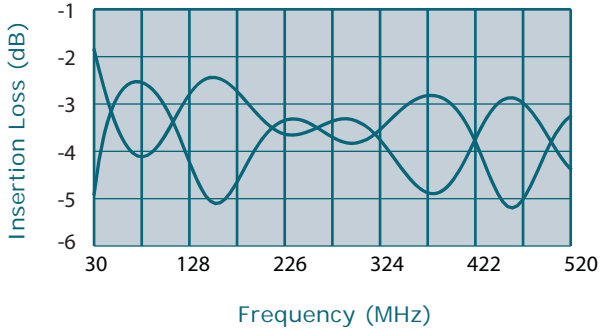


- Mount Coupler Flush with Heatsink
- Operating Temperature: -55°C to +85°C
- All specifications guaranteed
- Drop-In Style Unit
- Surface Finish Options:

QH8600-Sn : Immersion Tin (RoHS)

QH8600-Ag: Immersion Silver (RoHS)

QH8600-Au: ENIG (RoHS)

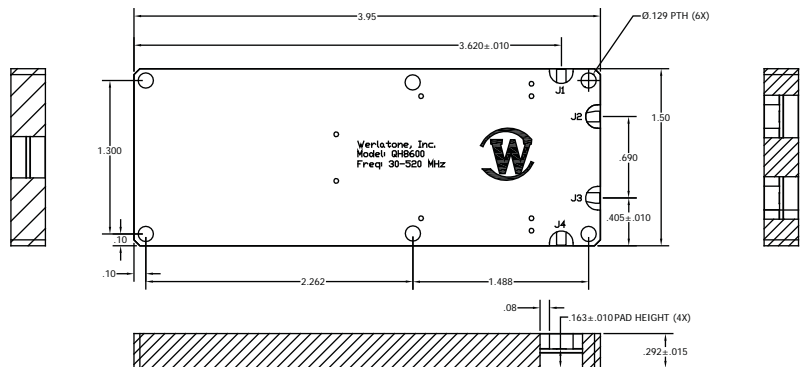

high power RF devices

**Subject to change without notice