



WERLATONE

SINCE 1965

Werlatone, Inc.
 17 Jon Barrett Road
 Patterson, New York 12563
 T 845.278.2220
 F 845.278.3440
 www.werlatone.com



40 dB Dual Directional Coupler

Model C5315

Frequency: 100 - 500 MHz

Power: 200 W CW

Coupling: 40 dB \pm 1.0 dB Nom.

Insertion Loss: 0.2 dB Max.

VSWR: 1.10:1 Max.





Flatness: \pm 0.3 dB Max.

Directivity: 20 dB Min.


**Mismatch Tolerant*[®] Design

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

* Designed to operate, at rated power, into an infinite VSWR.

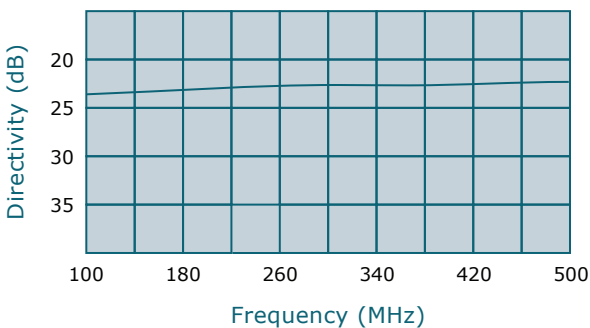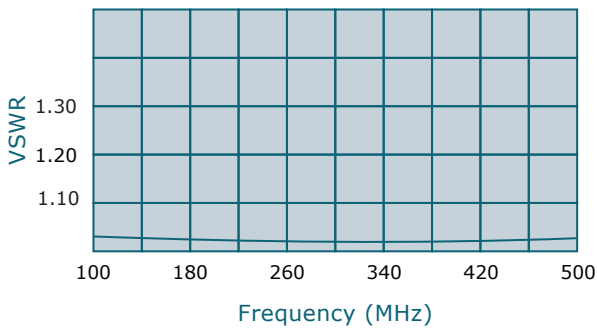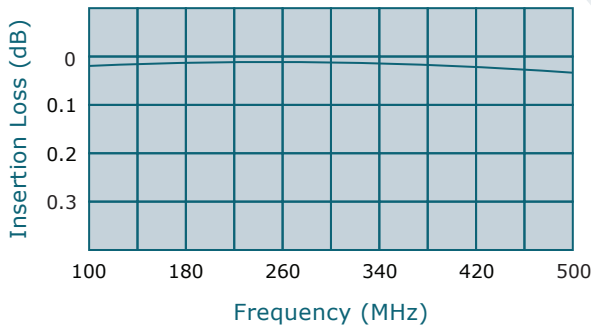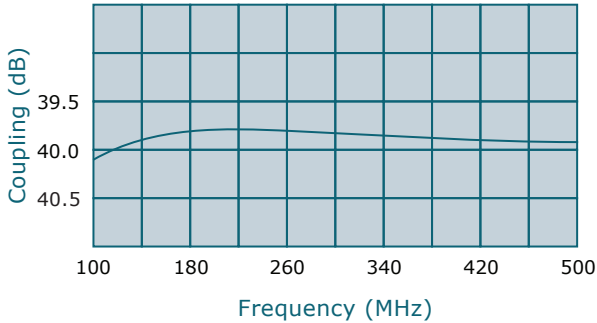

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C5315-10	N Female	N Female
C5315-12	N Female	SMA
C5315-13	N Female	BNC
C5315-102	SMA	SMA

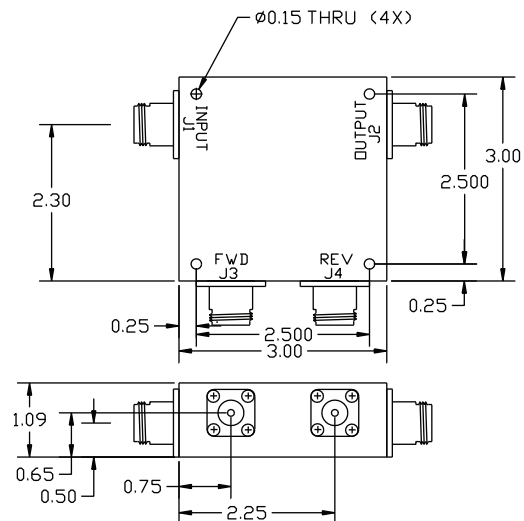

**Subject to change without notice