WERLATONE | SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

40 dB Dual Directional Coupler

Model C5369

Frequency:	400 - 1000 MHz
Power:	1000 W CW
Coupling:	40 dB ± 1.0 dB Nom.
Insertion Loss:	0.2 dB Max.
VSWR:	1.15:1 Max.
Flatness:	+/- 0.25 dB Max.
Directivity:	20dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

* Designed to operate, at 250 W CW, into an infinite VSWR.

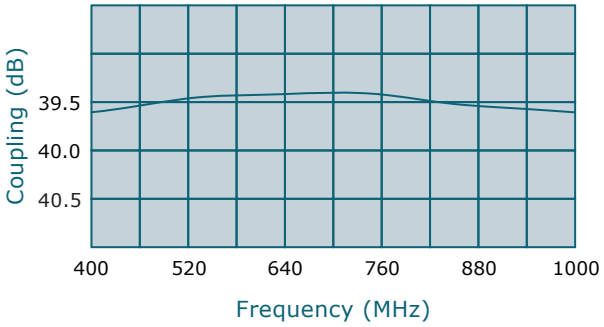

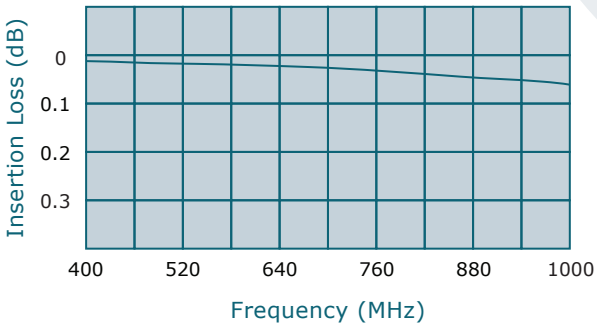

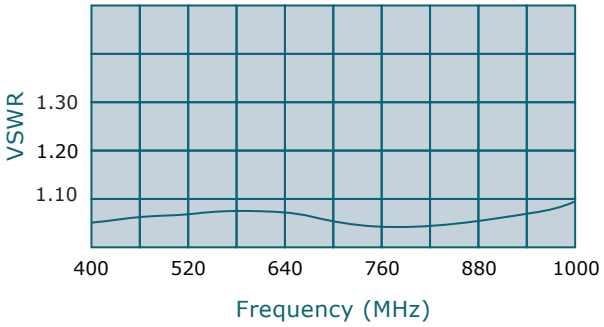

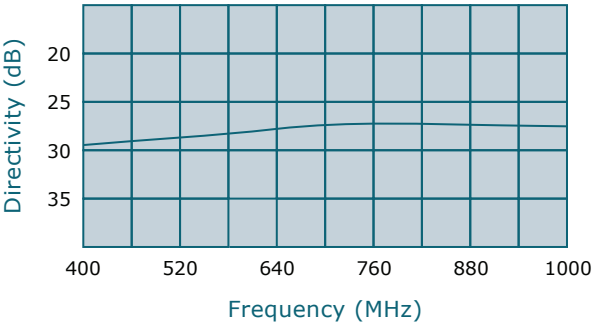

**Subject to change without notice

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C5369-10	N Female	N Female
C5369-12	N Female	SMA
C5369-13	N Female	BNC
C5369-102	SMA	SMA

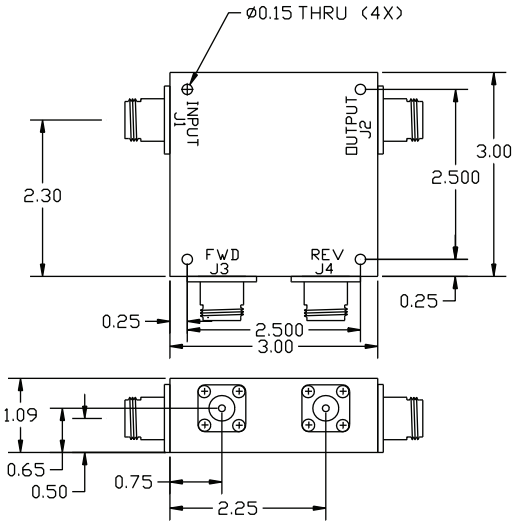

high power RF devices