




WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com



## 40 dB Dual Directional Coupler

### Model C5388

Frequency: 800 - 2000 MHz

Power: 100 W CW

Coupling: 40 dB ± 1.0 dB Nom.

Insertion Loss: 0.2 dB Max.





VSWR: 1.20:1 Max.

Flatness: +/- 0.3 dB Max.

Directivity: 20 dB Min.


\*Mismatch Tolerant® Design

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- \* Designed to operate, at rated power, into an infinite VSWR.

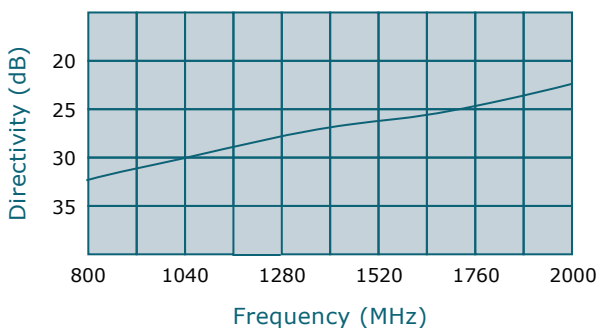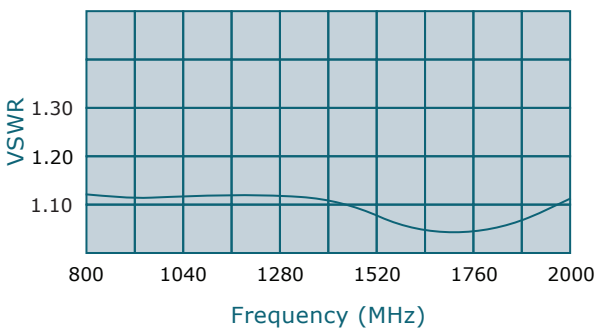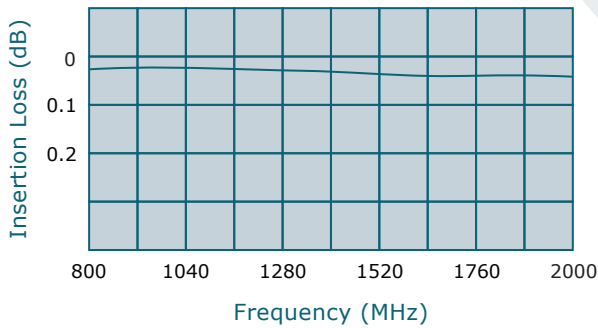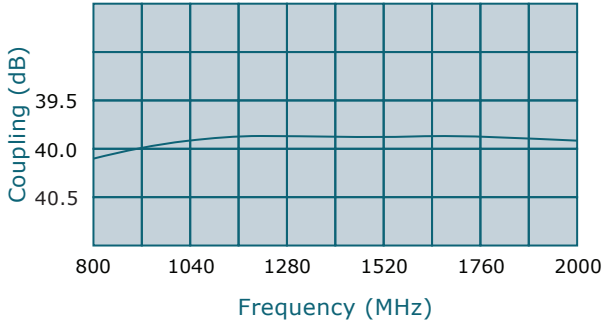

\*\*Subject to change without notice

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C5388-10	N Female	N Female
C5388-12	N Female	SMA
C5388-13	N Female	BNC
C5388-102	SMA	SMA

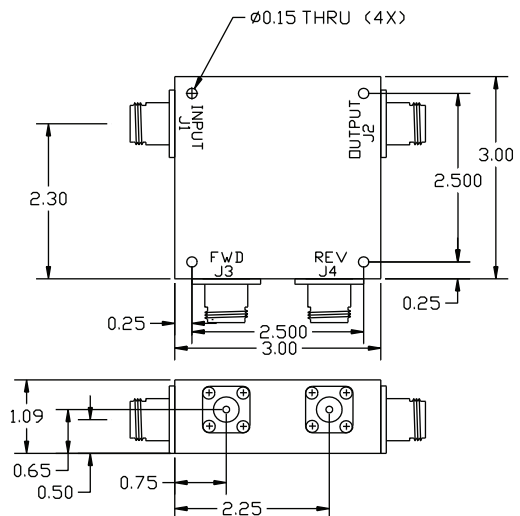

high power RF devices