



WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



40 dB Dual Directional Coupler


Model C6026

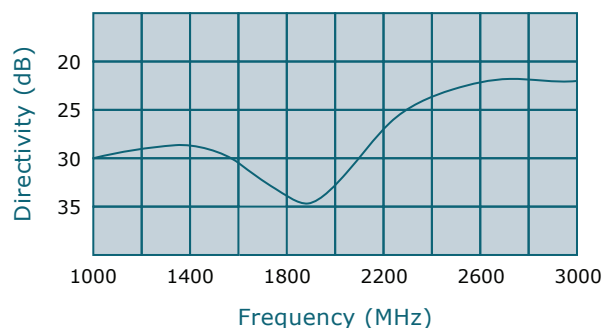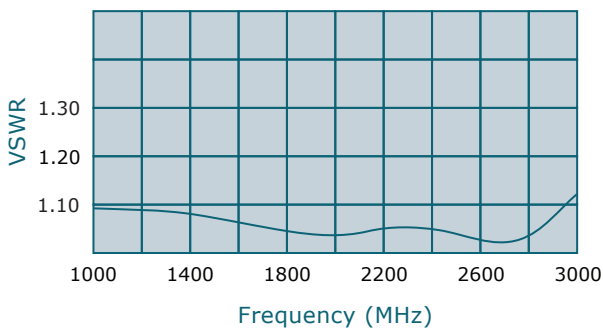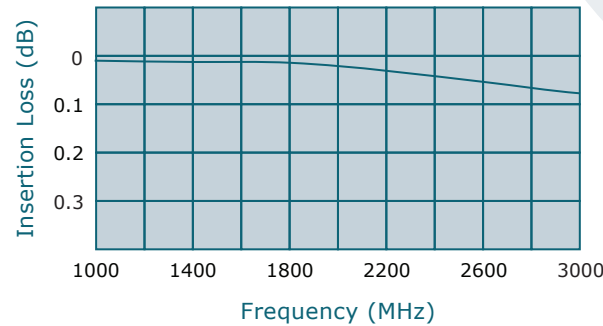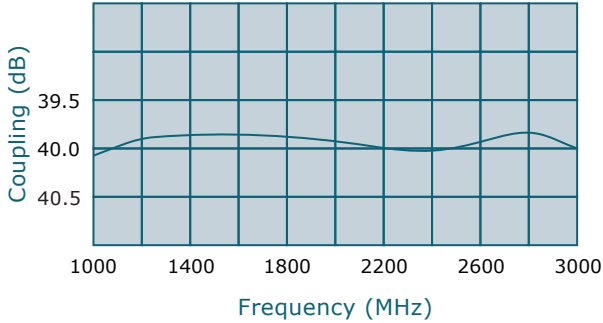

- Frequency: 1000 - 3000 MHz
- Power: 600 W CW
- Coupling: 40 dB \pm 1.0 dB Nom.
- Insertion Loss: 0.3 dB Max.
- VSWR: 1.30:1 Max.
- Flatness: \pm 0.5 dB Max.
- Directivity: 20 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C6026-10	N Female	N Female
C6026-12	N Female	SMA
C6026-13	N Female	BNC
C6026-43	SC Female	SMA

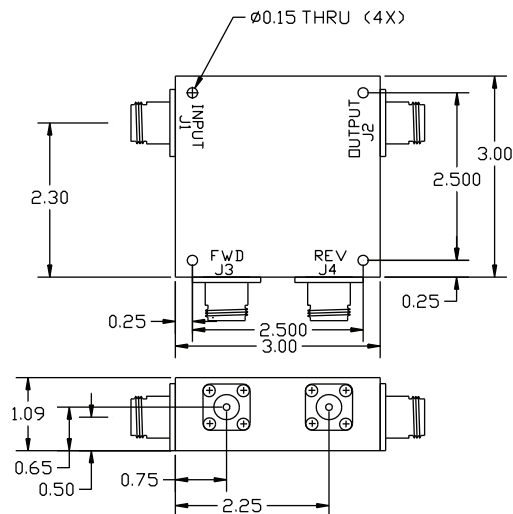

**Subject to change without notice