



**WERLATONE**

SINCE 1965

Werlatone, Inc.  
 17 Jon Barrett Road  
 Patterson, New York 12563  
 T 845.278.2220  
 F 845.278.3440  
 www.werlatone.com



## 50 dB Dual Directional Coupler

### Model C2310

Frequency: 20 - 230 MHz

Power: 2,000 W CW

Coupling: 50 dB  $\pm$  1.0 dB Nom.





Insertion Loss: 0.1 dB Max.

VSWR: 1.05:1 Max.


Flatness:  $\pm$  0.5 dB Max.

Directivity: 20 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

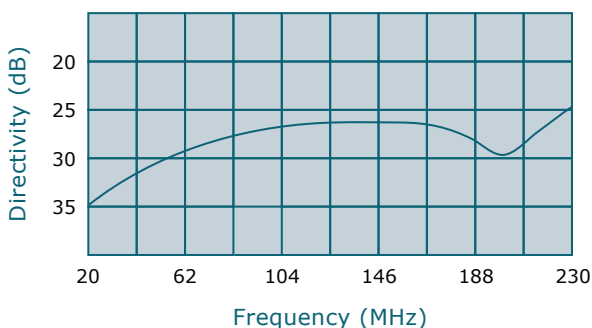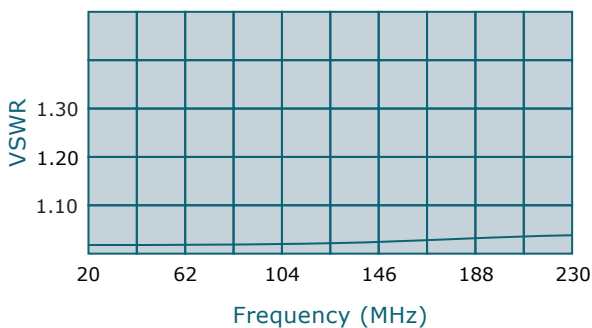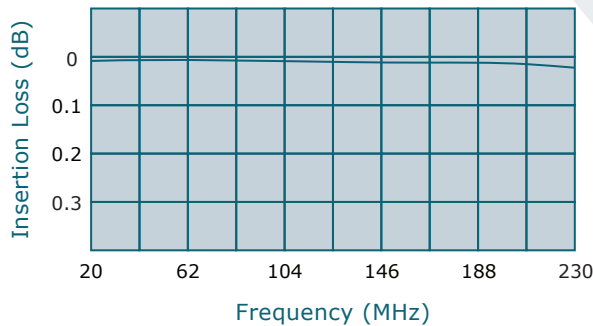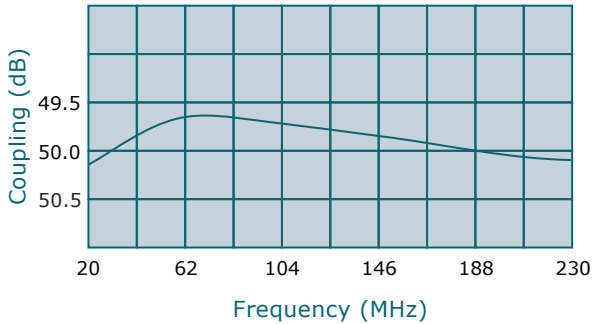

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C2310-10	N Female	N Female
C2310-12	N Female	SMA
C2310-13	N Female	BNC
C2310-43	SC Female	SMA

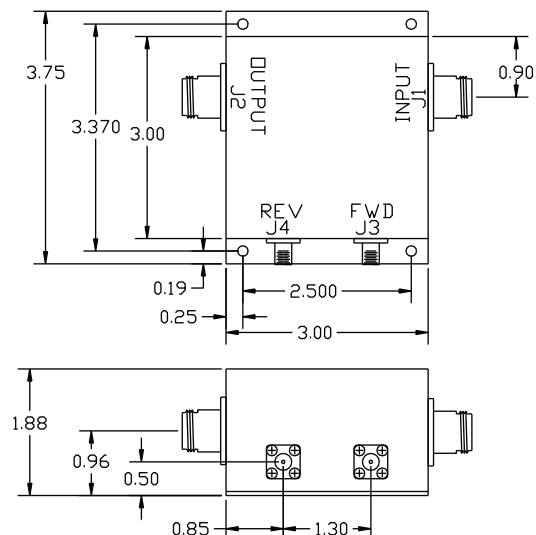

\*\*Subject to change without notice