



WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



50 dB Dual Directional Coupler

Model C3908

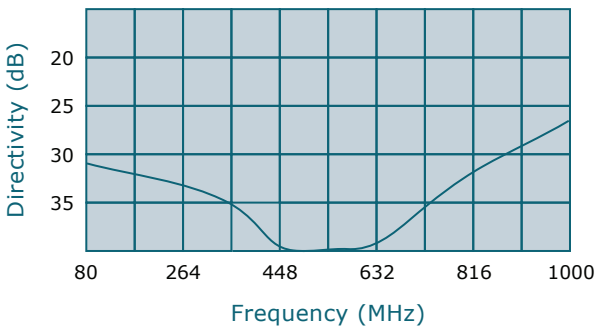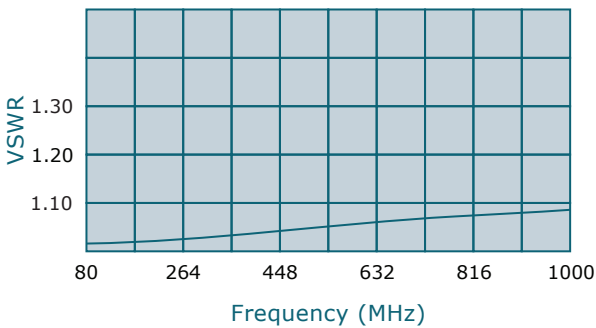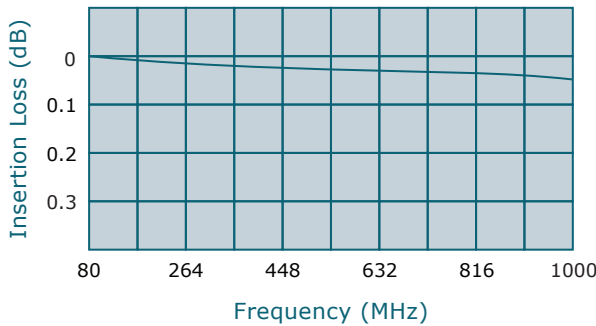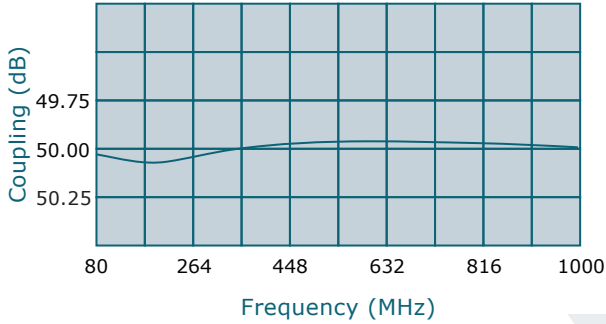

Frequency: 80 - 1000 MHz

Power: 1,500 W CW

Coupling: 50 dB ± 1.0 dB Nom.

Insertion Loss: 0.1 dB Max.

VSWR: 1.20:1 Max.


Flatness: +/- 0.3 dB Max.

Directivity: 20 dB Min.

*Mismatch Tolerant® Design

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- * Designed to operate, at rated power, into an infinite VSWR.

| Connector Configurations | | |
|--------------------------|------------------|----------------------|
| Model | J1,J2 (Mainline) | J3,J4 (Coupled Port) |
| C3908-10 | N Female | N Female |
| C3908-12 | N Female | SMA |
| C3908-13 | N Female | BNC |
| C3908-43 | SC Female | SMA |

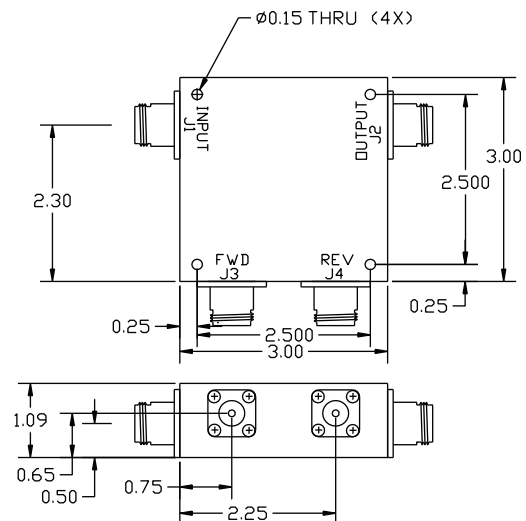

**Subject to change without notice