



WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



50 dB Dual Directional Coupler

Model C5324

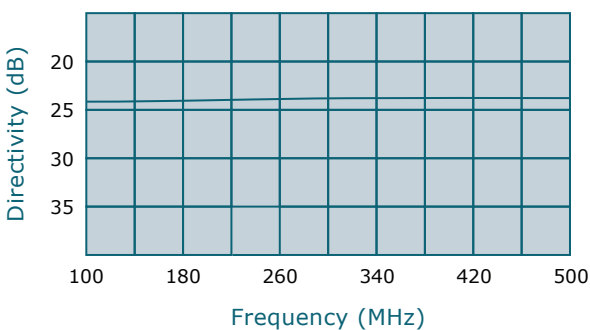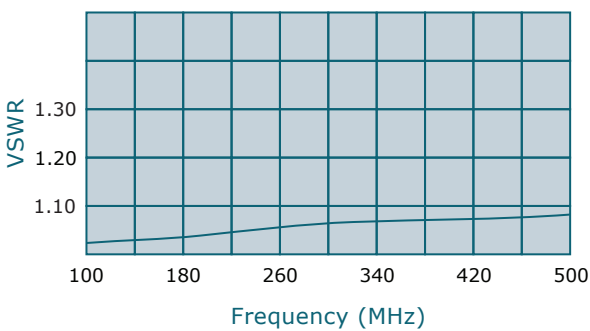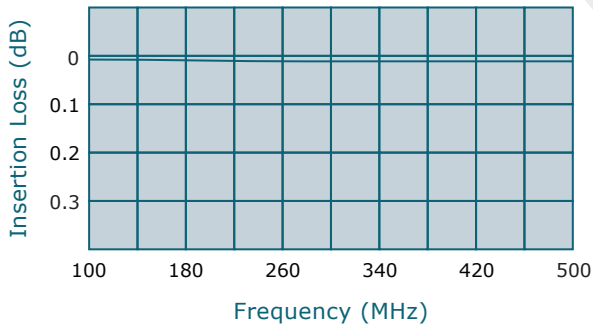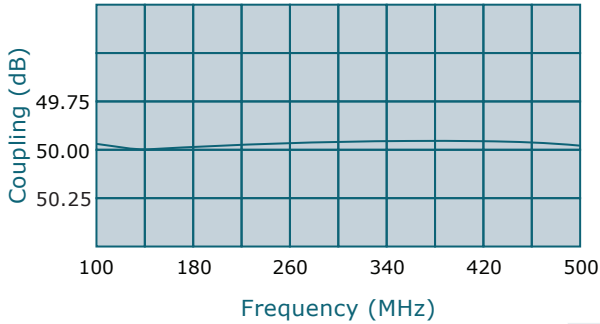


**Subject to change without notice

- Frequency: 100 - 500 MHz
- Power: 1500 W CW
- Coupling: 50 dB ± 1.0 dB Nom.
- Insertion Loss: 0.2 dB Max.
- VSWR: 1.15:1 Max.
- Flatness: +/- 0.3 dB Max.
- Directivity: 20 dB Min.

*Mismatch Tolerant® Design

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- * Designed to operate, at rated power, into an infinite VSWR.

| Connector Configurations | | |
|--------------------------|------------------|----------------------|
| Model | J1,J2 (Mainline) | J3,J4 (Coupled Port) |
| C5324-10 | N Female | N Female |
| C5324-12 | N Female | SMA |
| C5324-13 | N Female | BNC |
| C5324-43 | SC Female | SMA |

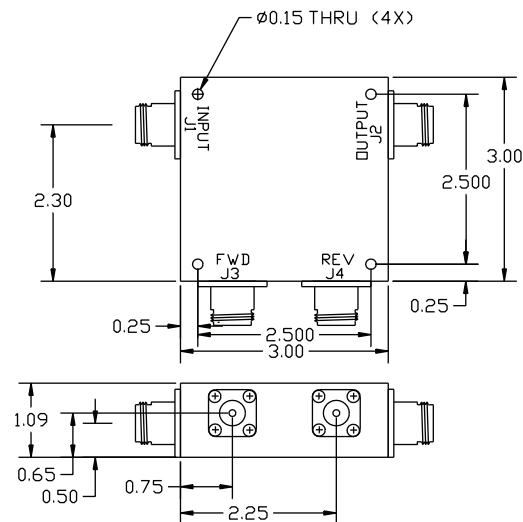

high power RF devices