







WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

50 dB Dual Directional Coupler

Model C3052

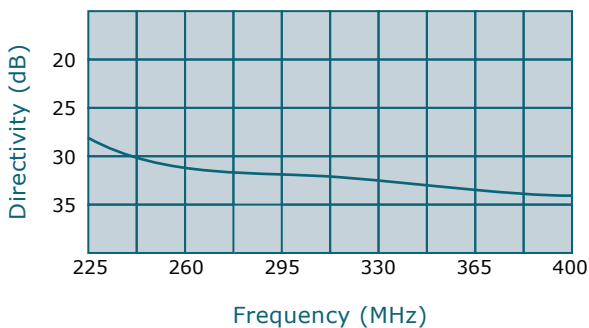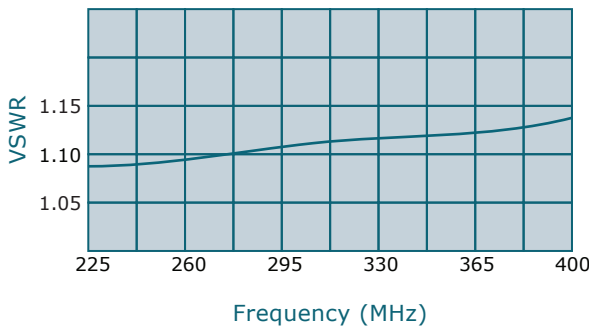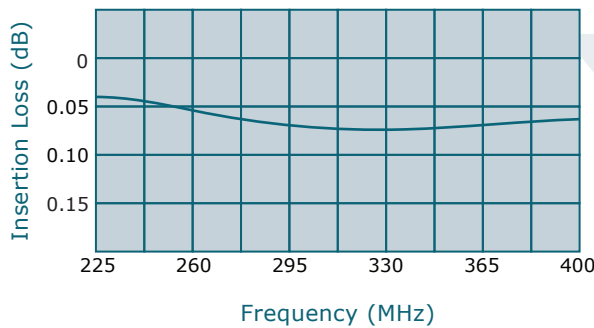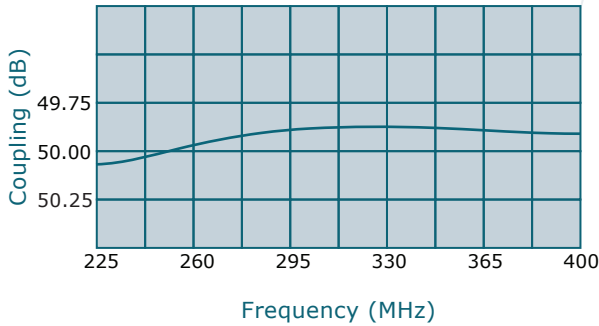

Frequency: 225-400 MHz

Power: 5000 W CW

Coupling: 50 dB \pm 1.0 dB Nom.

Insertion Loss: 0.10 dB Max.


VSWR: 1.15:1 Max.

Flatness: \pm 0.25 dB Max.

Directivity: 25 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- * Designed to operate, at rated power, into an infinite VSWR.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C3052-81	1 5/8" EIA	N Female
C3052-84	1 5/8" EIA	BNC

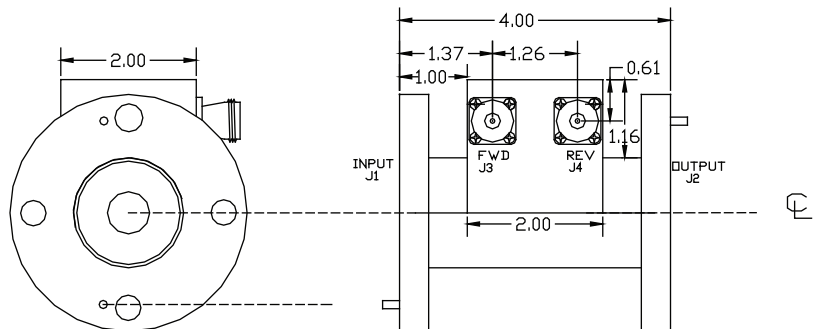

high power RF devices

**Subject to change without notice