



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



60 dB Dual Directional Coupler

Model C5925

Frequency: 0.01 - 250 MHz

Power: 3,500 W CW





Coupling: 60 dB ± 1.0 dB Nom.

Insertion Loss: 0.15 dB Max.

VSWR: 1.15:1 Max.

Flatness: +/-1.0 dB Max.


Directivity: 20 dB Min.

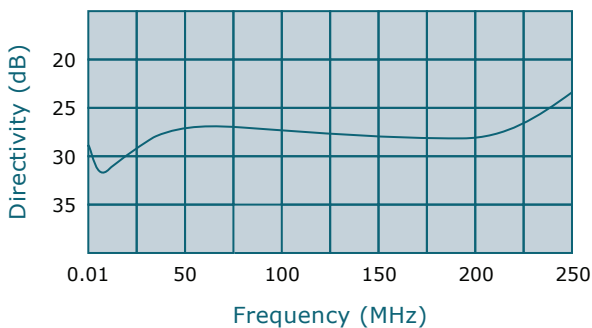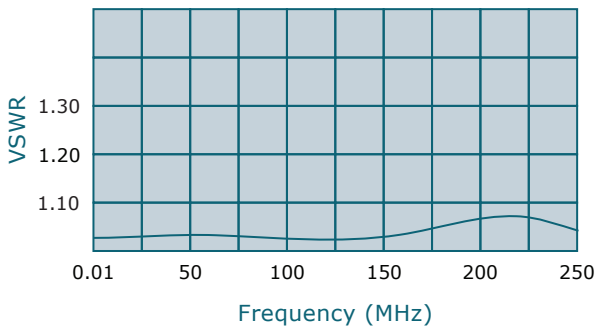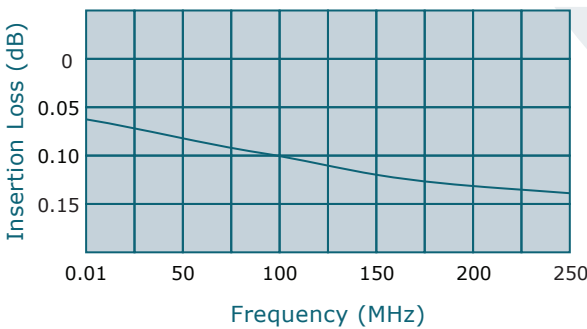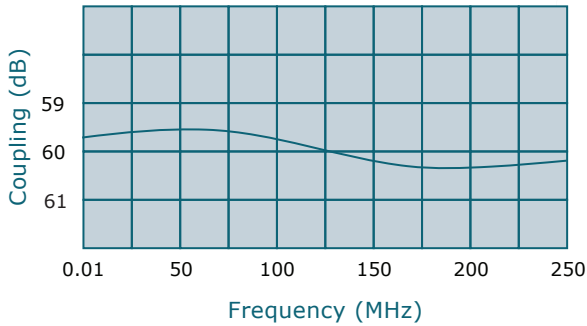

*Mismatch Tolerant® Design

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- * Designed to operate at 1900 W CW into an infinite VSWR.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C5925-10	N Female	N Female
C5925-12	N Female	SMA
C5925-13	N Female	BNC
C5925-20	7/16 Female	N Female

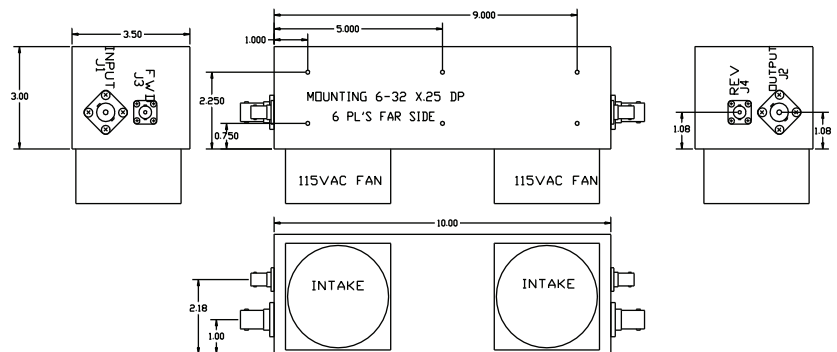

**Subject to change without notice