




WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



60 dB Dual Directional Coupler

Model C3587

Frequency: 2 - 32 MHz

Power: 5,000 W CW





Coupling: 60 dB ± 1.0 dB Nom.

Insertion Loss: 0.05 dB Max.

VSWR: 1.05:1 Max.


Flatness: +/-0.5 dB Max.

Directivity: 20 dB Min.

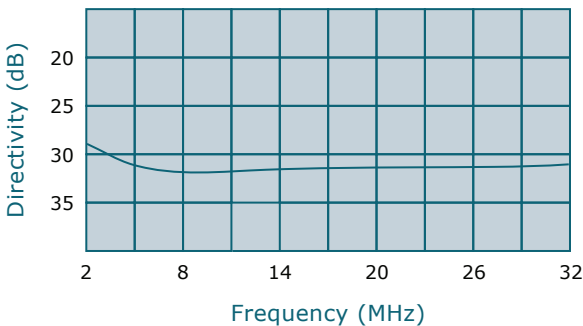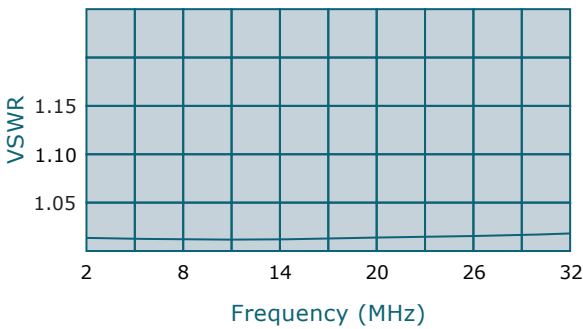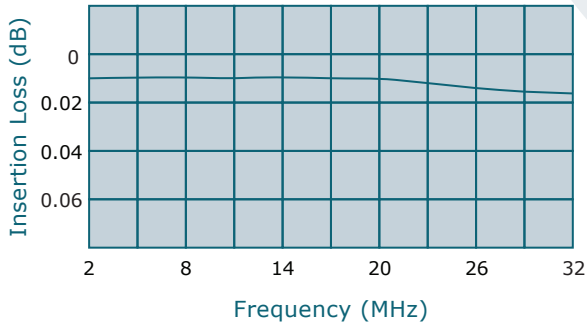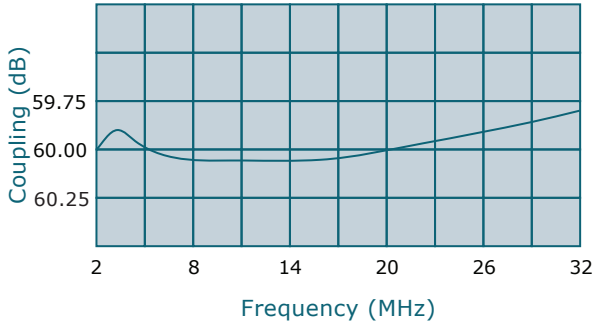

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C3587-10	N Female	N Female
C3587-12	N Female	SMA
C3587-13	N Female	BNC
C3587-20	7/16 Female	N Female

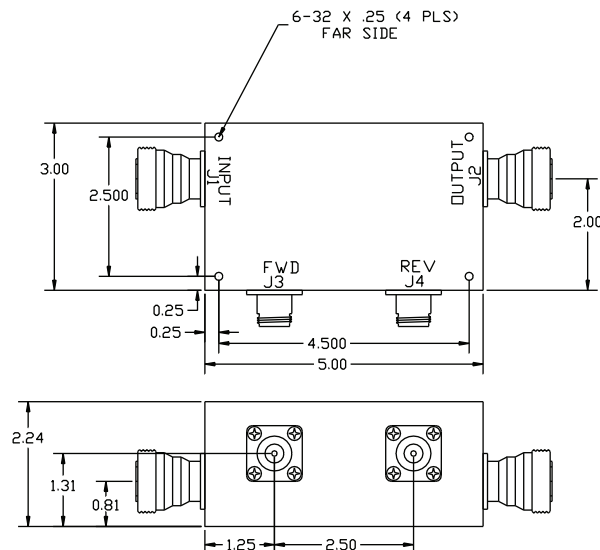

**Subject to change without notice