



WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



2-Way Combiner/Divider

Model D6283

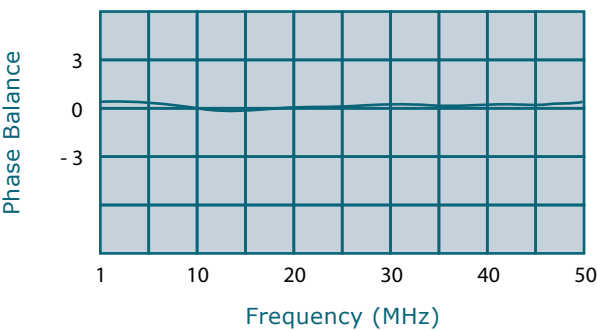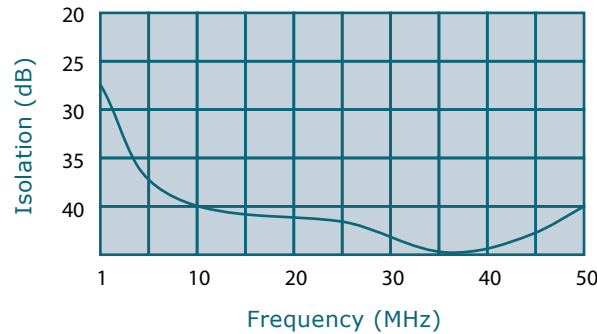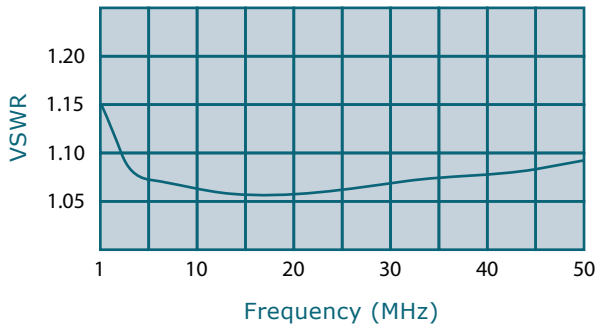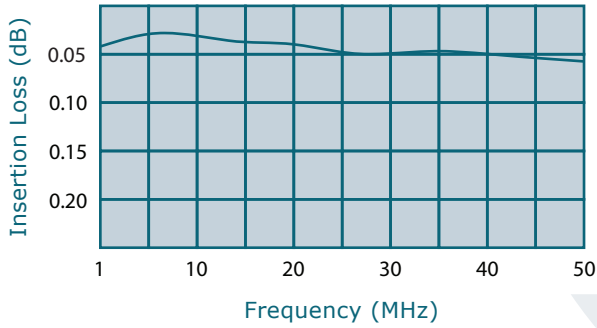

Frequency: 1 - 50 MHz

Power: 2,000 W CW

Insertion Loss: 0.2 dB Max.

VSWR: 1.25:1 Max.



Isolation: 20 dB Min.

Phase Balance: 3 Deg. Max.

Amplitude Balance: 0.1 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

| Connector Configurations | | |
|--------------------------|---------------|-----------------------|
| Model | J3 (Sum Port) | J1, J2 (Input/Output) |
| D6283-10 | N Female | N Female |
| D6283-12 | N Female | SMA |
| D6283-20 | 7/16 Female | 7/16 Female |

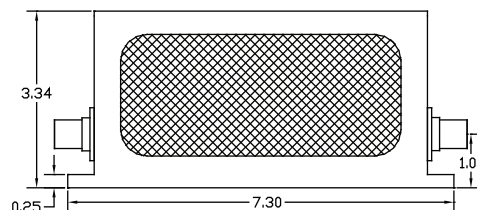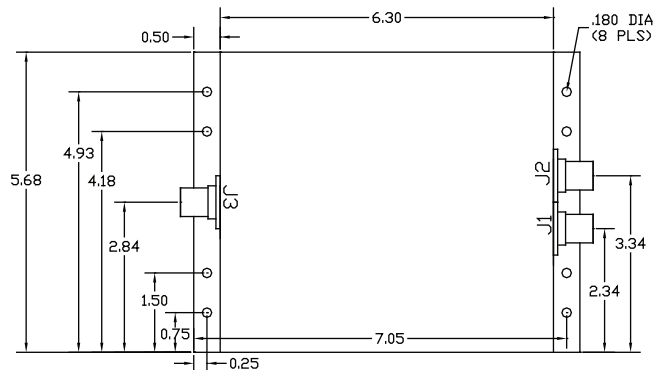

**Subject to change without notice

high power RF devices