



WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

## 2-Way Combiner/Divider

### Model D5576

Frequency: 20 - 500 MHz

Power: 1500 W CW





Insertion Loss: 0.5 dB Max.

VSWR: 1.35:1 Max.

Isolation: 15 dB Min.


Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.3 dB Max.

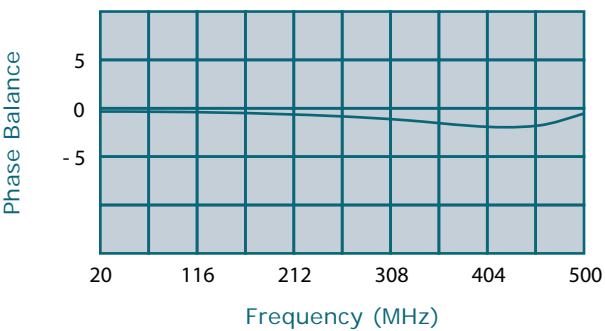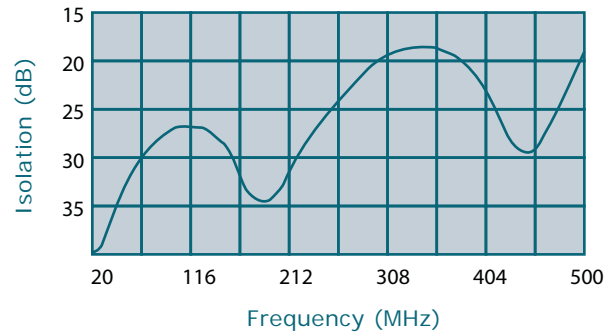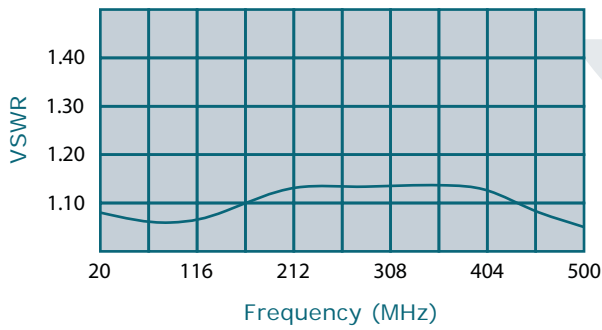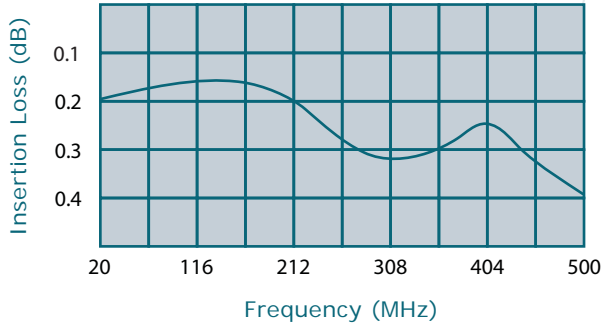

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

| Connector Configuration |               |                      |
|-------------------------|---------------|----------------------|
| Model                   | J1 (Sum Port) | J2-J3 (Input/Output) |
| D5576-20                | 7/16 Female   | N Female             |
| D5576-43                | SC Female     | N Female             |

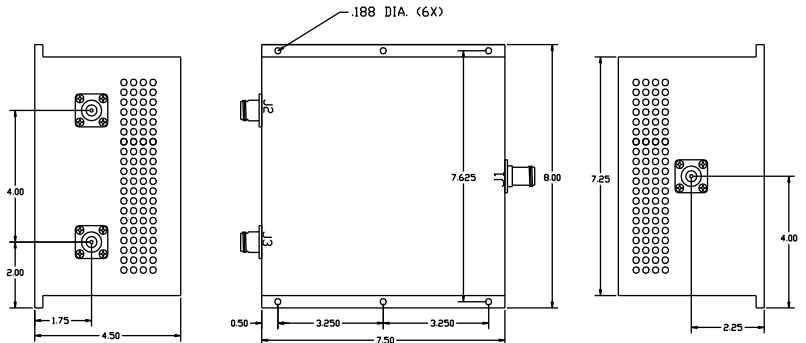

high power RF devices

\*\*Subject to change without notice