



WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



2-Way Combiner/Divider

Model D5700

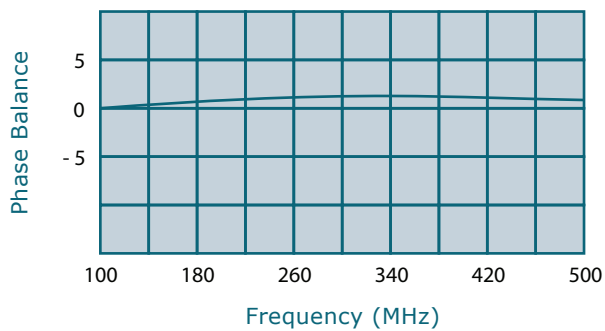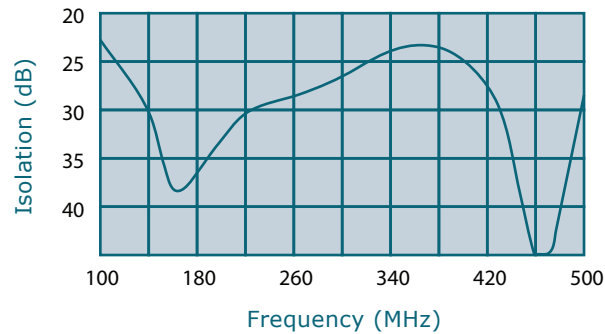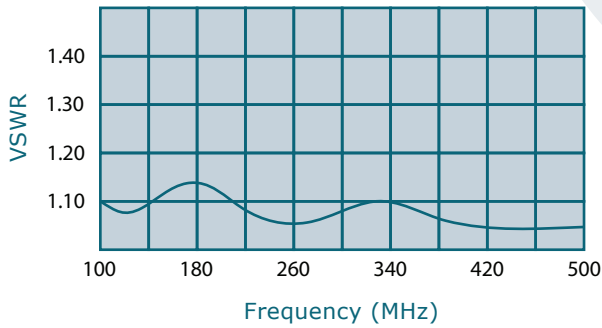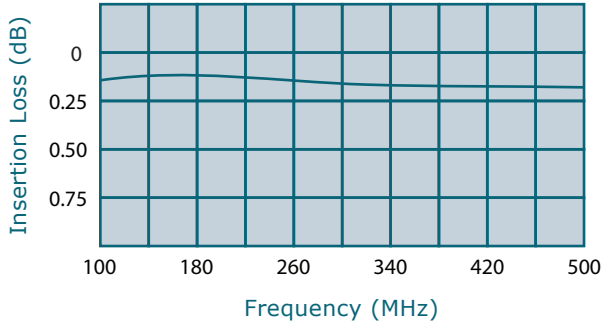

Frequency: 100-500 MHz

Power: 1,500 W CW

Insertion Loss: 0.30 dB Max.

VSWR: 1.30:1 Max.


Isolation: 20 dB Min.

Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.1 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J1 (Sum Port)	J2,J3 (Inputs/Outputs)
D5700-10	N Female	N Female
D5700-20	7/16 Female	N Female
D5700-40	SC Female	SC Female
D5700-41	SC Female	N Female

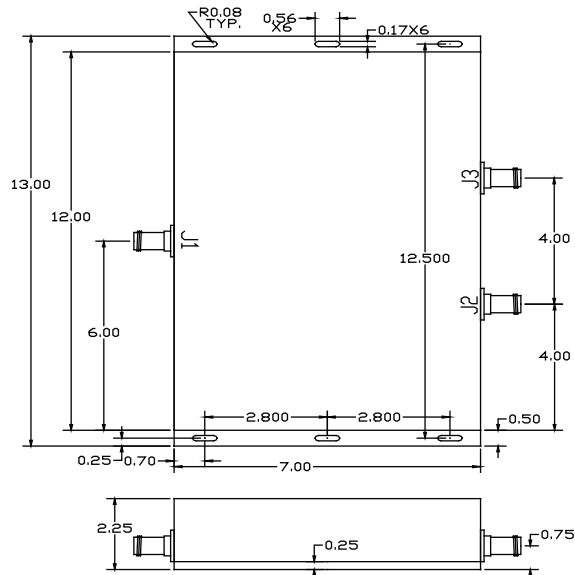

**Subject to change without notice

high power RF devices