




WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

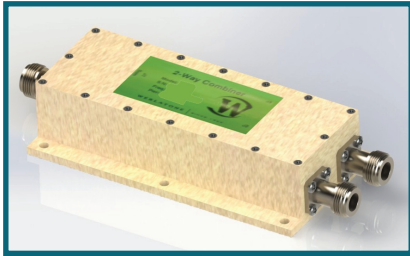

## 2-Way Combiner/Divider

### Model D6263

Frequency: 800 - 4200 MHz

Power: 150 W CW





Insertion Loss: 0.5 dB Max.

VSWR: 1.40:1 Max.

Isolation: 15 dB Min.


Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.25 dB Max.

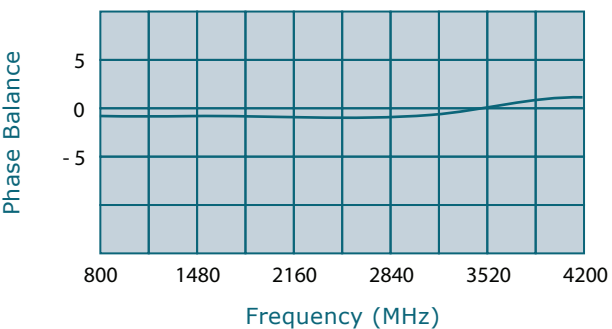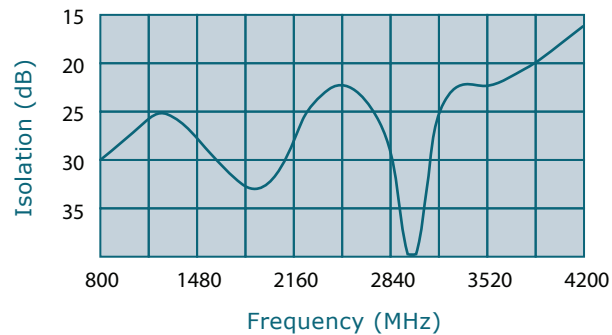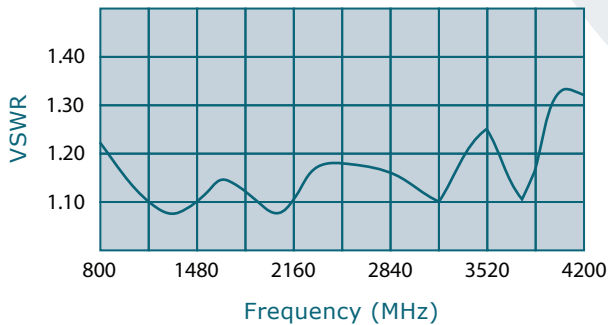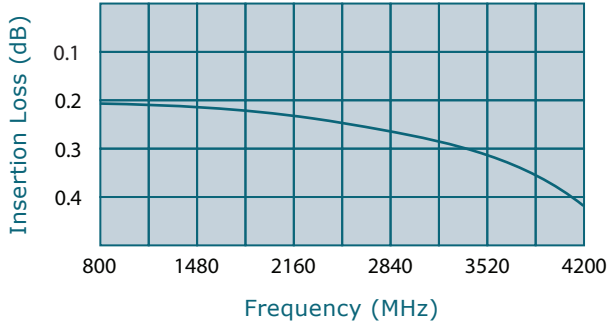

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configuration		
Model	J1 (Sum Port)	J2-J3 (Input/Output)
D6263-10	N Female	N Female
D6263-12	N Female	SMA
D6263-13	N Female	BNC
D6263-102	SMA	SMA

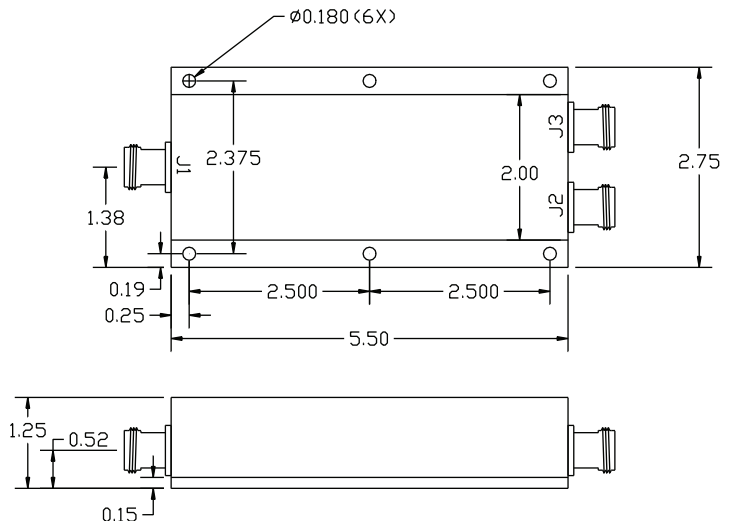

\*\*Subject to change without notice

high power RF devices