



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

2-Way Combiner/Divider

Model D5743

Frequency: 3100 - 3500 MHz

Power: 300 W CW





Insertion Loss: 0.4 dB Max.

VSWR: 1.40:1 Max.

Isolation: 20 dB Min.


Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.2 dB Max.

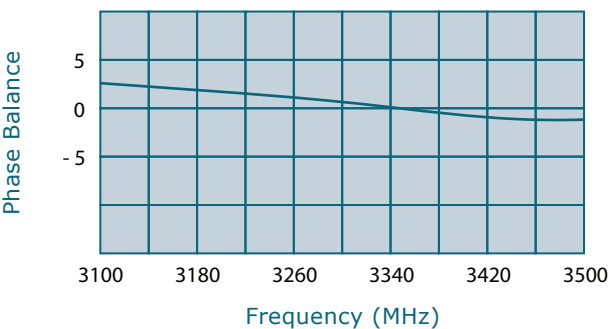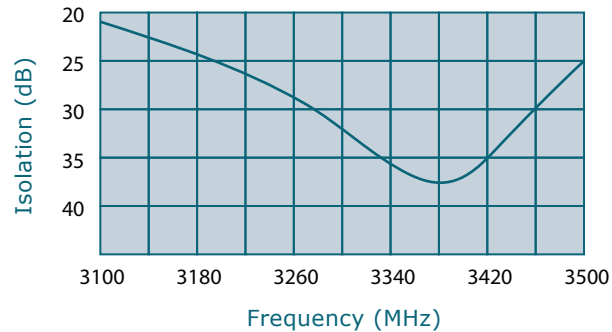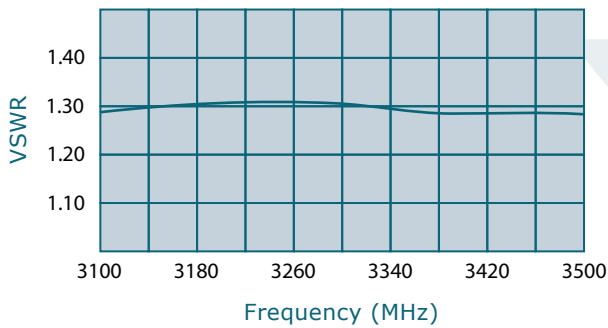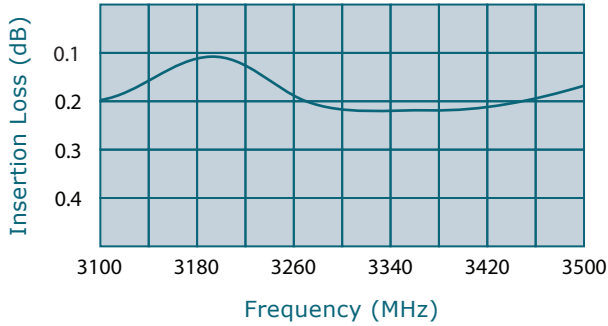

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

| Model | Connectors | |
|-----------|------------|--------------|
| | <u>J1</u> | <u>J2-J3</u> |
| D5743-10 | N Female | N Female |
| D5743-12 | N Female | SMA |
| D5743-300 | TNC Female | TNC Female |

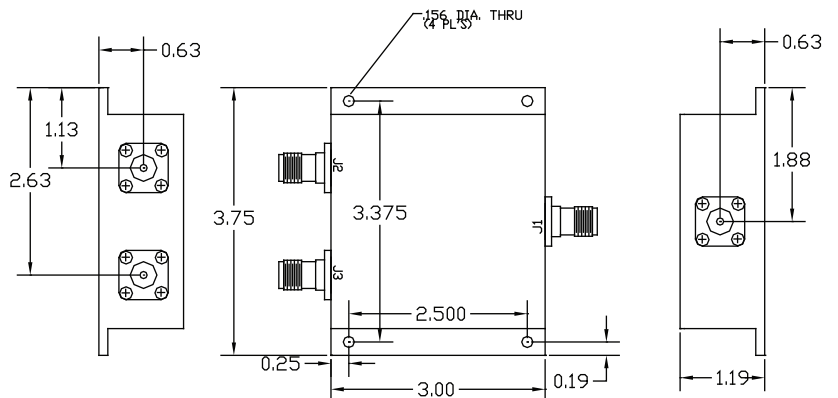

**Subject to change without notice

high power RF devices