




WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



2-Way 90° Combiner/Divider

Model QH6312

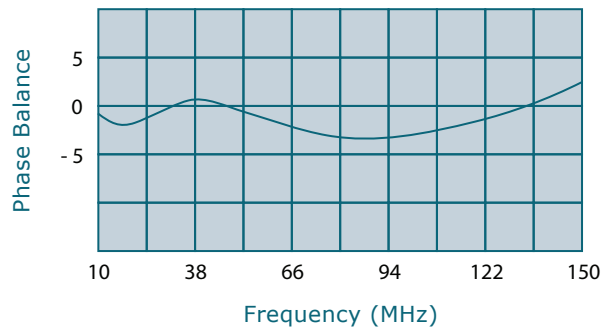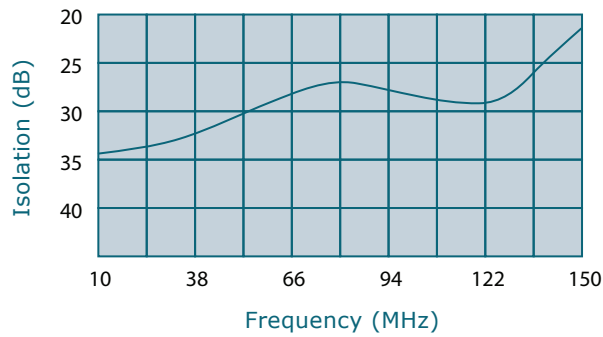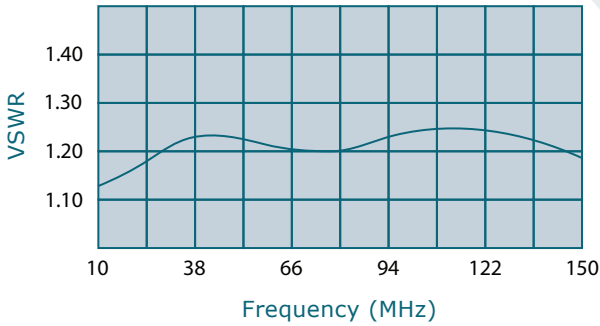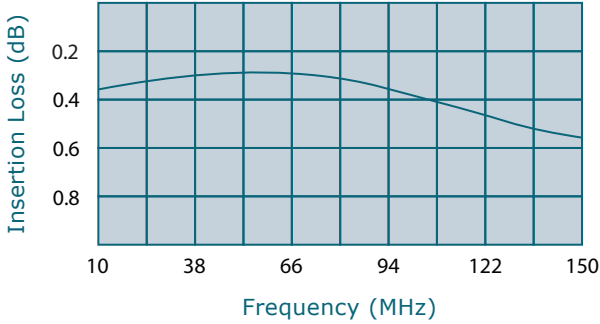

Frequency: 10-150 MHz

Power: 10 W CW

Insertion Loss: 0.6 dB Max.

VSWR: 1.30:1 Max.


Isolation: 20 dB Min.

Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.3 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J1 (Sum Port)	J2,J3 (90°, 0°)
QH6312-10	N Female	N Female
QH6312-12	N Female	SMA
QH6312-13	N Female	BNC
QH6312-102	SMA	SMA

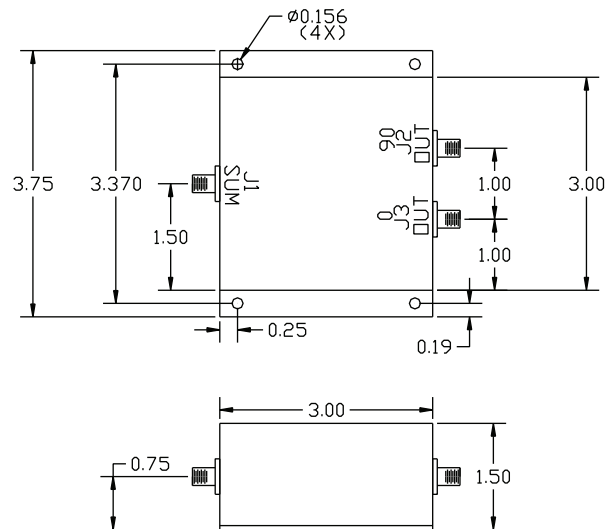

high power RF devices

**Subject to change without notice