WERLATONE | SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

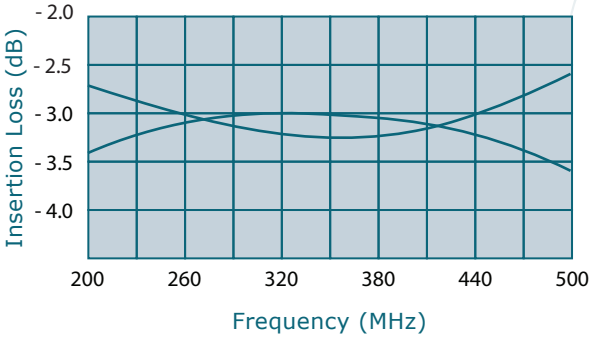

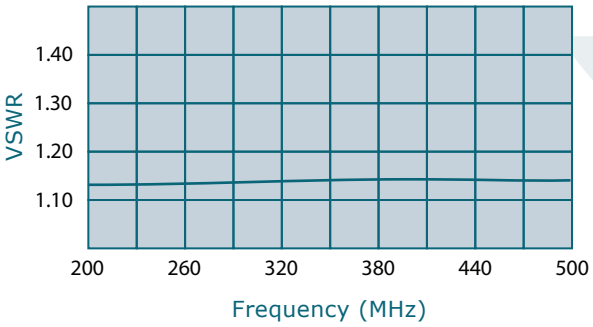

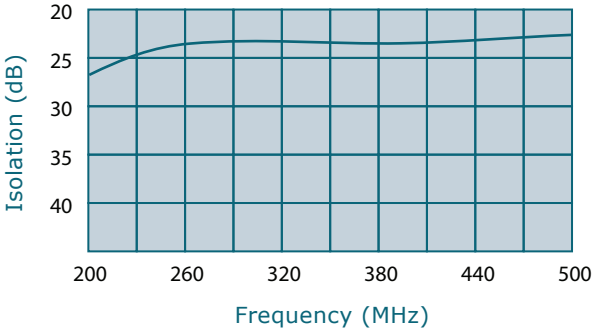

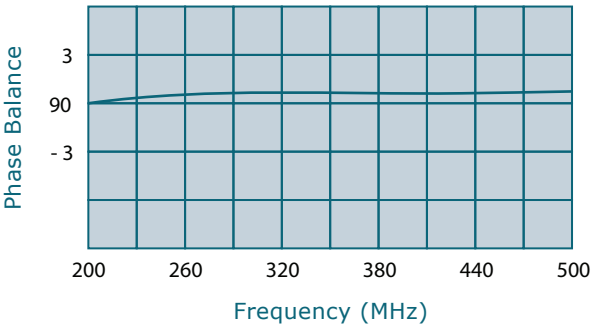

2-Way(90 Deg.)Combiner

Model QH3548

Frequency:	470-860 MHz
Power:	300 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.3:1 Max.
Isolation:	20 dB Min.
Phase Balance:	3 Deg. Max.
Amplitude Balance:	0.5 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Model	Connectors J1	Connectors J2-J3-J4
QH3548-10	N Female	N Female
QH3548-12	N Female	SMA
QH3548-102	SMA	SMA

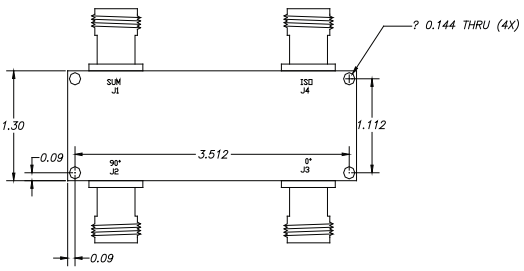

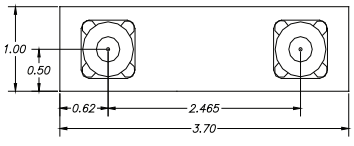

high power RF devices