



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

2-Way 180° Combiner/Divider

Model H6287

Frequency: 0.1-50 MHz

Power: 500 W CW

Insertion Loss: 0.5 dB Max.





VSWR: 1.30:1 Max.

Isolation: 30 dB Min.


Phase Balance: $180^\circ \pm 6^\circ$ Max.

Amplitude Balance: 0.2 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

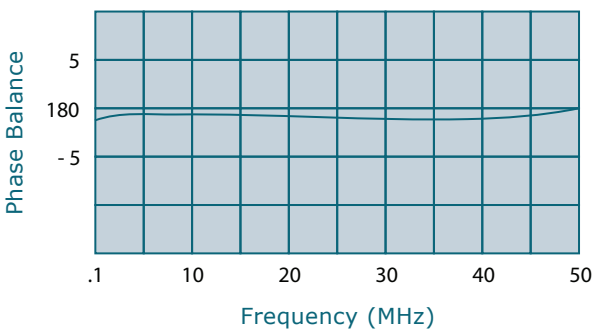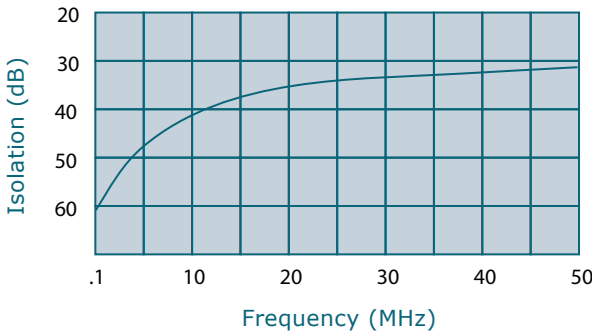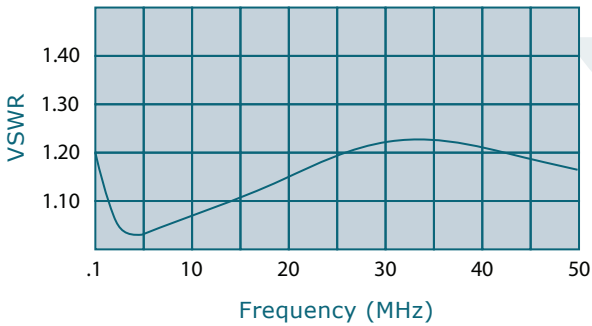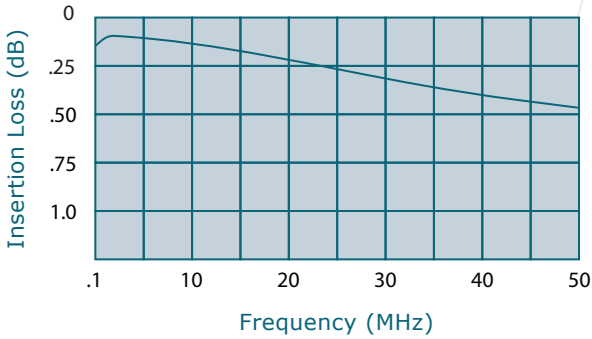

Connector Configurations			
Model	J4 (Sumport)	J2,J3 (Inputs/Outputs)	J1 (Diff. Port)
H6287-10	N Female	N Female	N Female
H6287-12	N Female	SMA	SMA

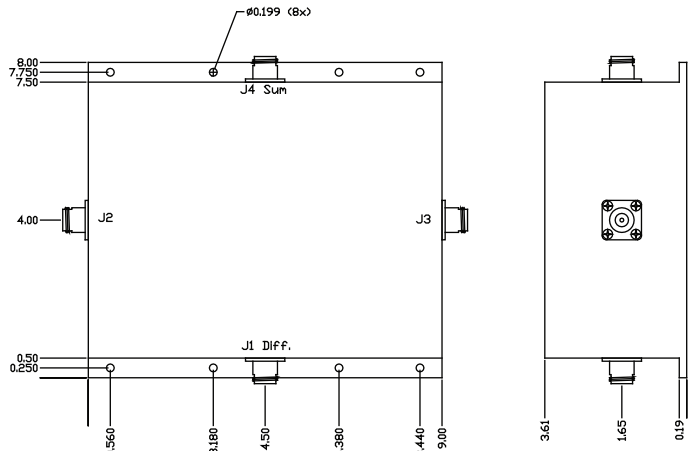

high power RF devices

**Subject to change without notice