



Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

## 2-Way 180° Combiner/Divider

### Model H6152

Frequency: 0.2 - 35 MHz

Power: 50 W CW





Insertion Loss: 0.4 dB Max.

VSWR: 1.3:1 Max.

Isolation: 20 dB Min.



Phase Balance: 180° ± 5° Max.

Amplitude Balance: 0.2 dB Max.

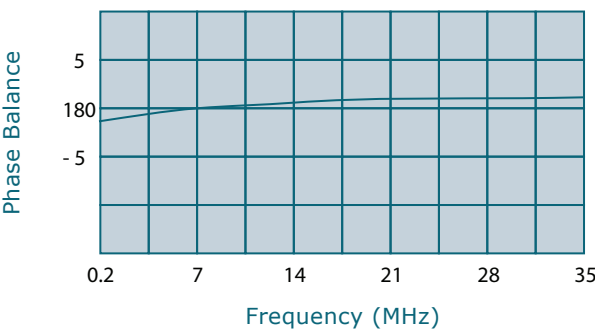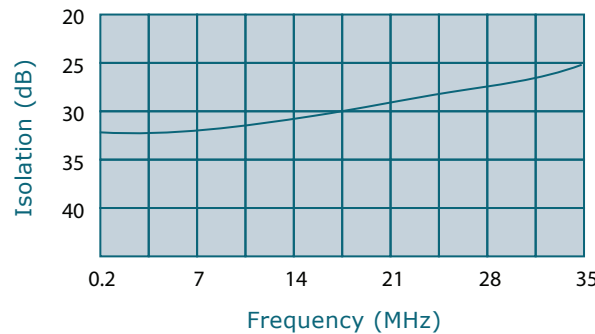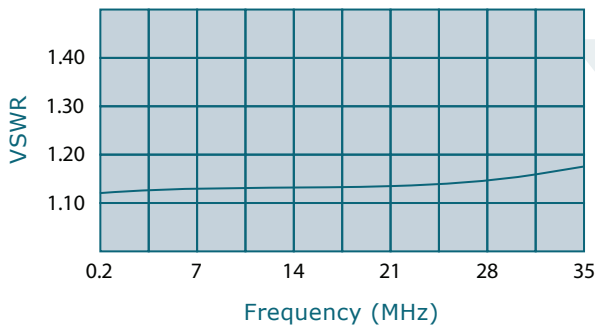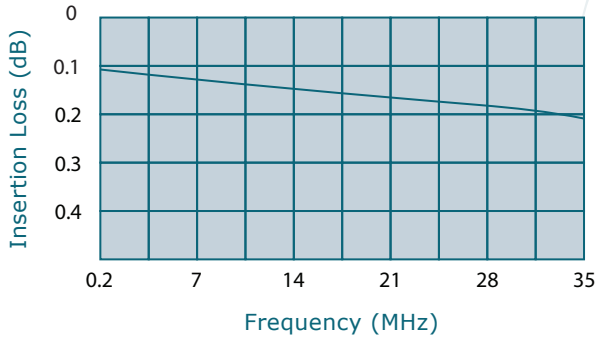

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J1 (Sumport)	J2-J4 (Inputs/Outputs)
H6152-10	N Female	N Female
H6152-12	N Female	SMA
H6152-13	N Female	BNC
H6152-102	SMA	SMA



\*\*Subject to change without notice