



WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

## 4-Way Combiner/Divider

### Model D5704

Frequency: 0.1 - 30 MHz

Power: 1000 W CW





Insertion Loss: 0.4 dB Max.

VSWR: 1.30:1 Max.


Isolation: 20 dB Min.

Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.2 dB Max.

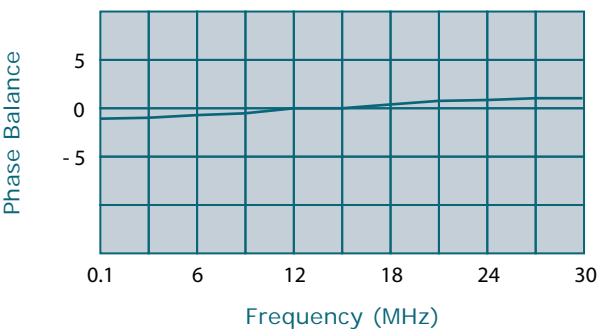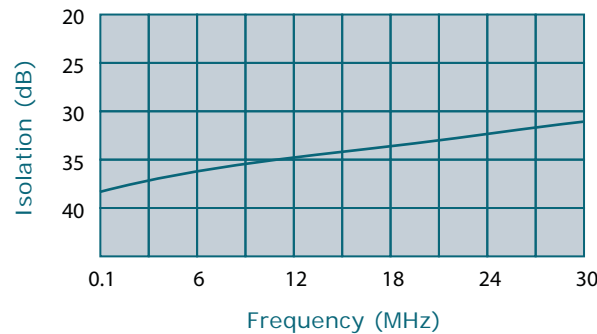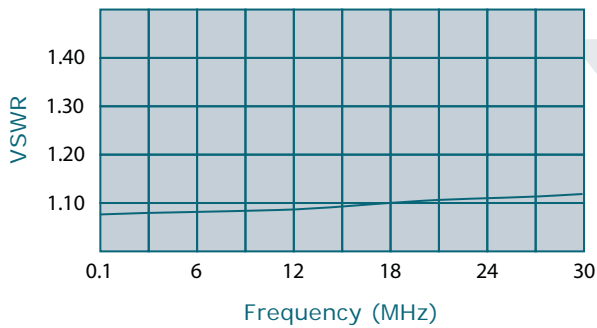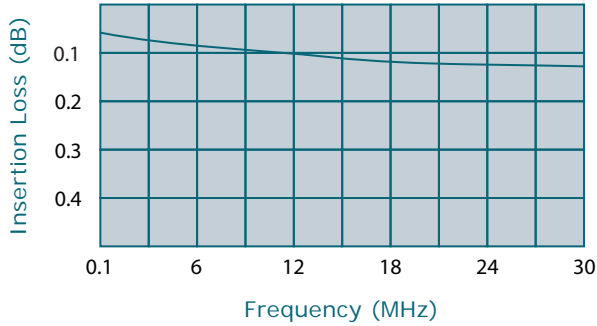

Connector Configurations		
Model	J5 (Sum Port)	J1-J4 (Inputs/Outputs)
D5704-10	N Female	N Female
D5704-12	N Female	SMA
D5704-13	N Female	BNC

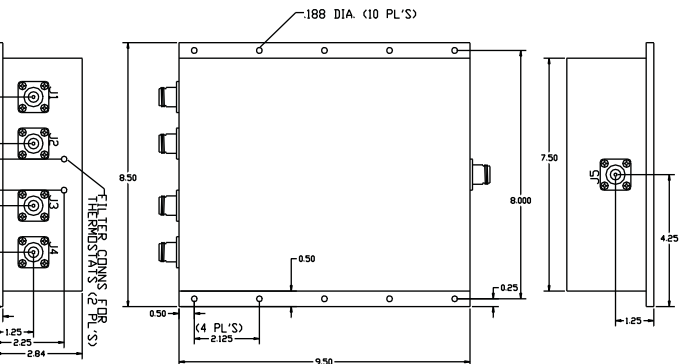

high power RF devices

\*\*Subject to change without notice