



Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

4-Way Combiner/Divider

Model D3510

Frequency: 0.5 - 30 MHz

Power: 5 W CW

Insertion Loss: 0.5 dB Max.





VSWR: 1.30:1 Max.

Isolation: 30 dB Min.



Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.2 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

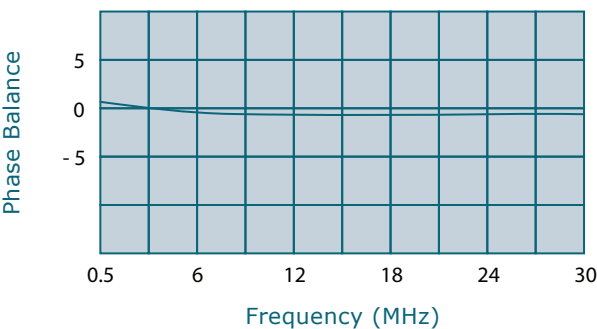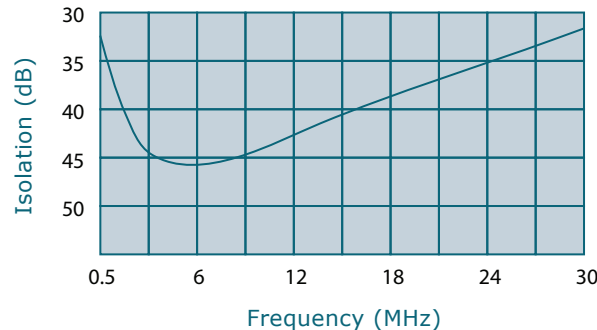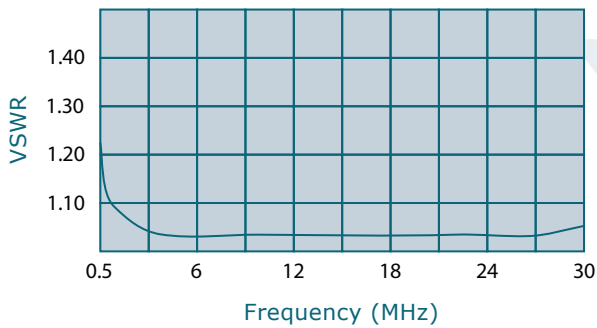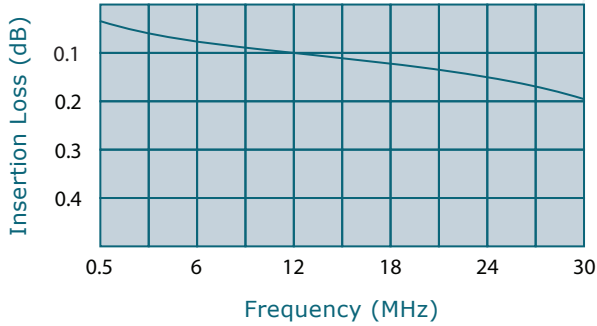

Connector Configurations		
Model	J5	J1-J4
D3510-10	N Female	N Female
D3510-12	N Female	SMA
D3510-13	N Female	BNC
D3510-102	SMA	SMA

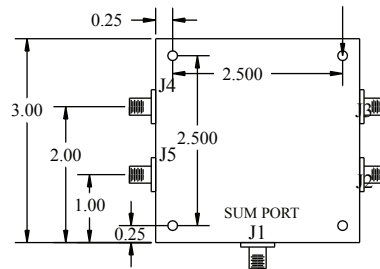

**Subject to change without notice