WERLATONE | SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



4-Way Combiner/Divider

Model D5387

Frequency:	1-50 MHz
Power:	1000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.30:1 Max.
Isolation:	20 dB Min.
Phase Balance:	5 Deg. Max.
Amplitude Balance:	0.1 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.

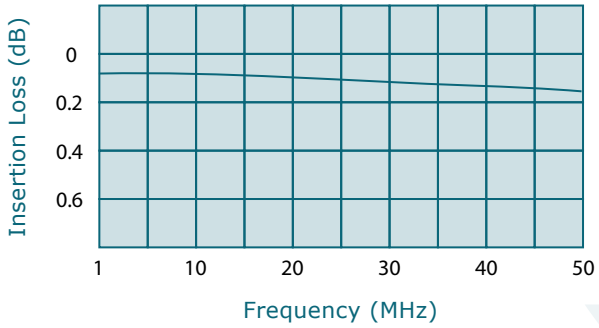

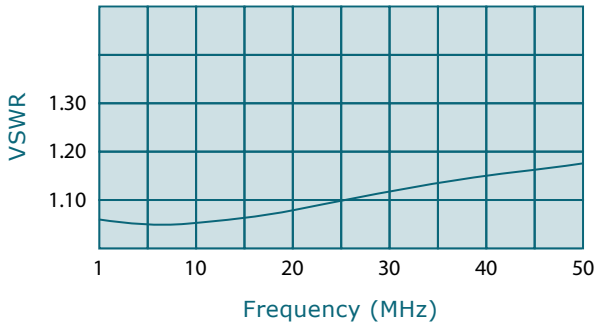

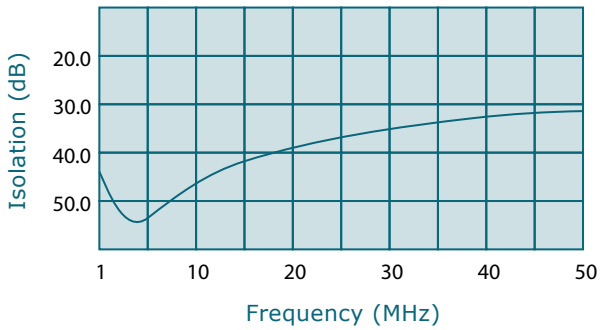

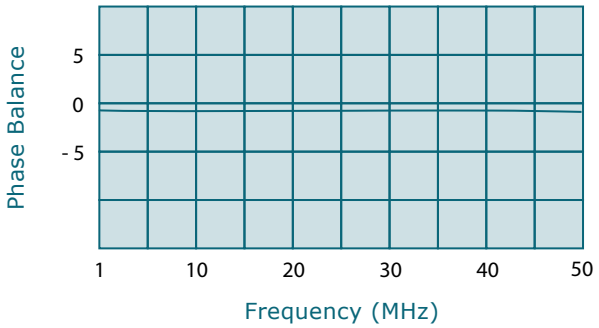

Connector Configurations		
Model	J5 (Sum Port)	J1-J4 (Inputs/Outputs)
D5387-10	N Female	N Female
D5387-20	7/16 Female	N Female
D5387-41	SC Female	N Female

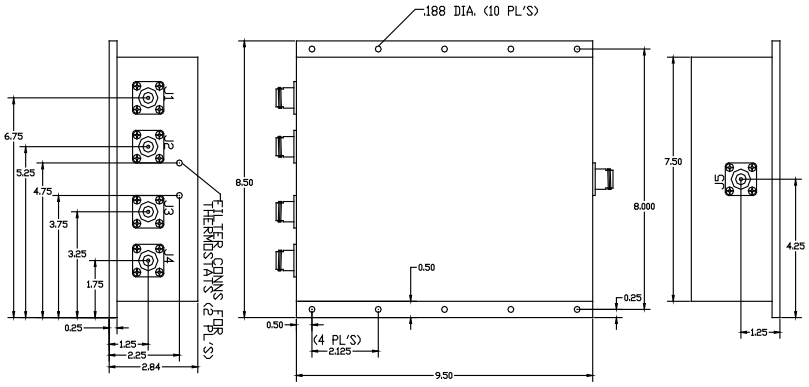

high power RF devices

**Subject to change without notice