



WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

## 4-Way Combiner/Divider

### Model D1572

Frequency: 1 - 1000 MHz

Power: 50 W CW





Insertion Loss: 1.2 dB Max.

VSWR: 1.50:1 Max.

Isolation: 20 dB Min.


Phase Balance: 6 Deg. Max.

Amplitude Balance: 0.5 dB Max.

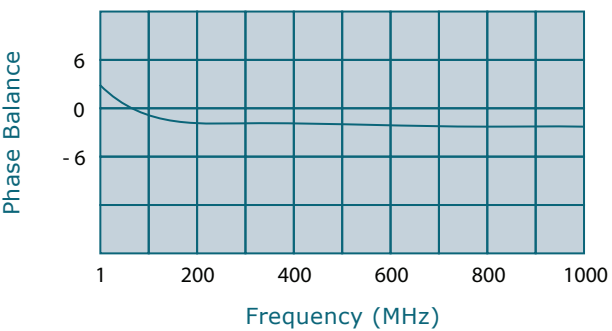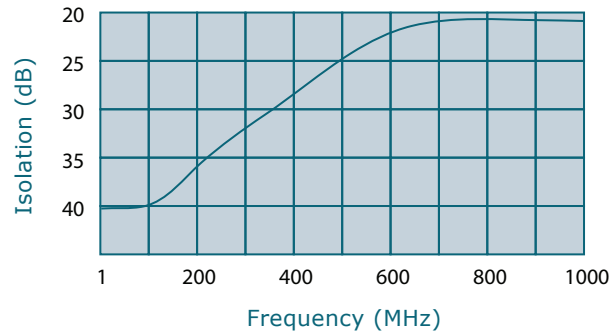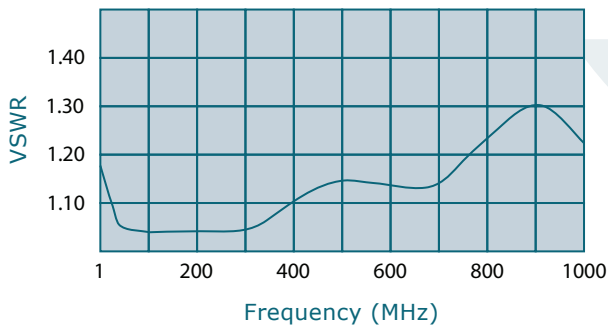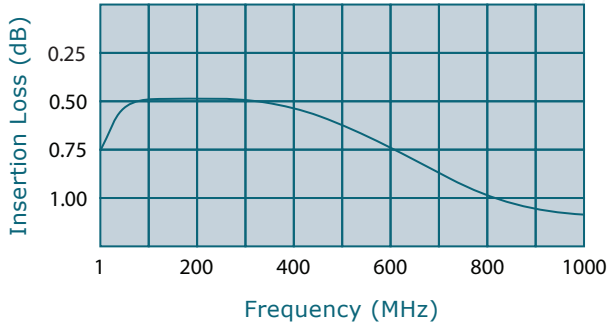

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J5 (Sum Port)	J1-J4 (Inputs/Outputs)
D1572-10	N Female	N Female
D1572-12	N Female	SMA
D1572-13	N Female	BNC
D1572-102	SMA	SMA

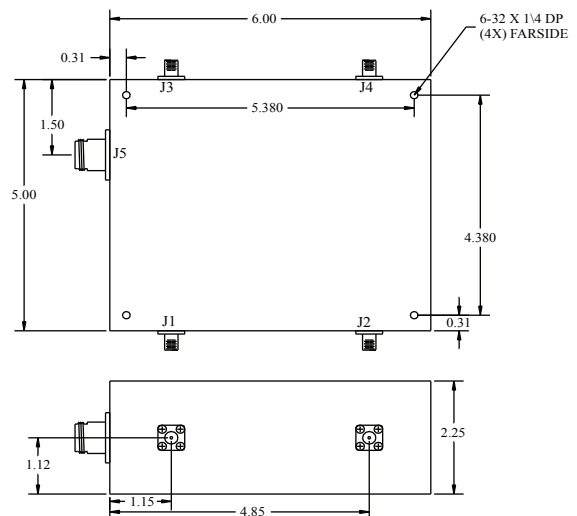

high power RF devices

\*\*Subject to change without notice