




WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

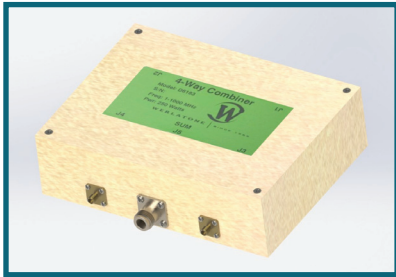

4-Way Combiner/Divider

Model D6183

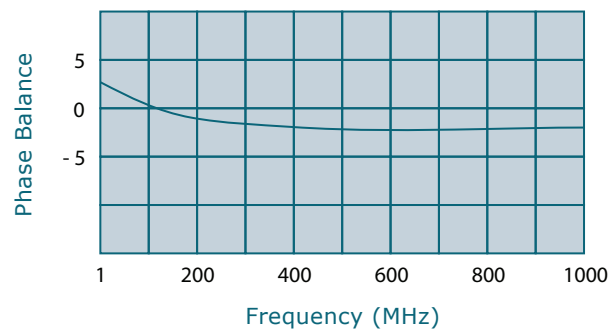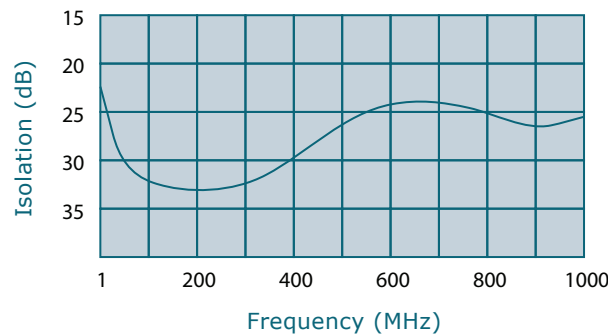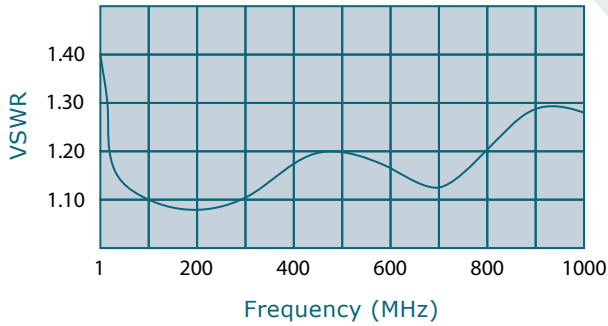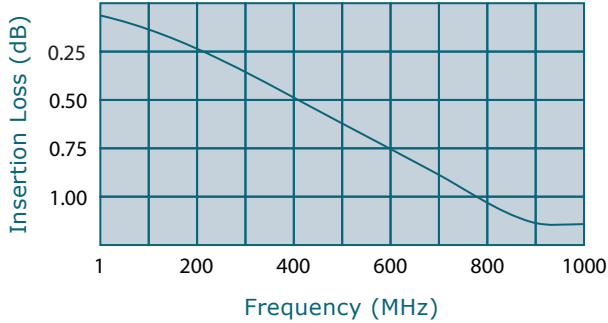

Frequency: 1 - 1000 MHz

Power: 250 W CW

Insertion Loss: 1.2 dB Max.

VSWR: 1.45:1 Max.


Isolation: 18 dB Min.

Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.6 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J5 (Sum Port)	J1-J4 (Inputs/Outputs)
D6183-10	N Female	N Female
D6183-12	N Female	SMA
D6183-13	N Female	BNC

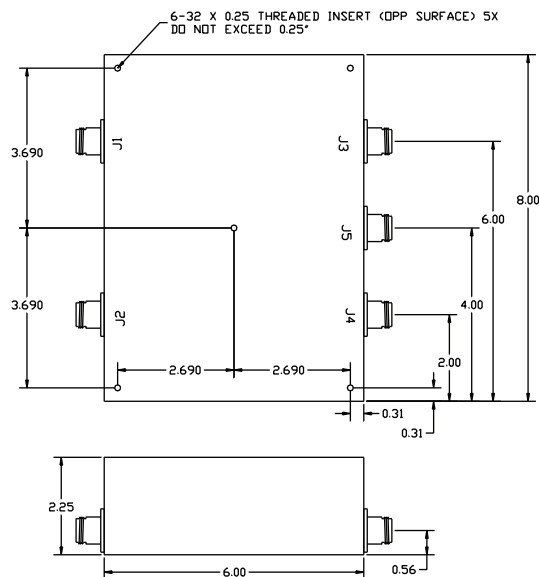

**Subject to change without notice

high power RF devices