




WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

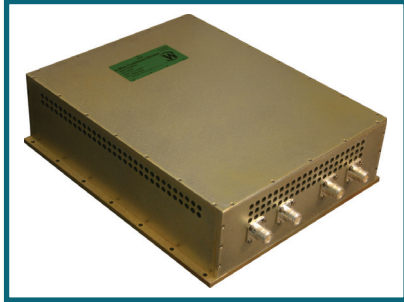

4-Way Combiner/Divider

Model D5807

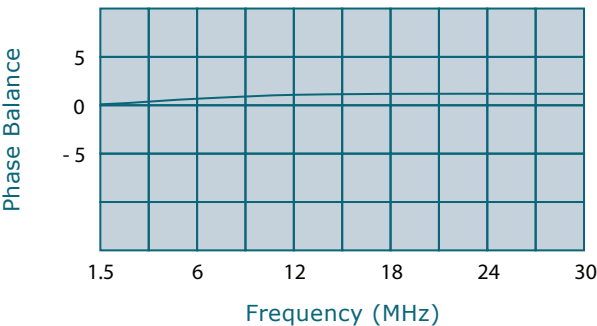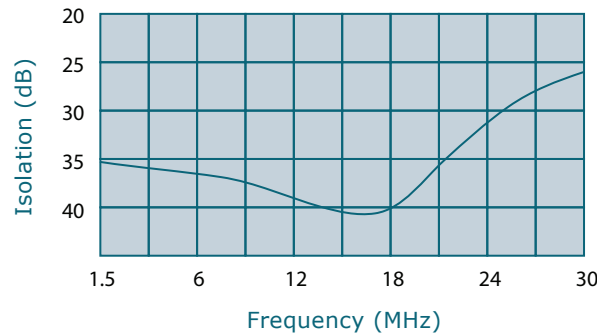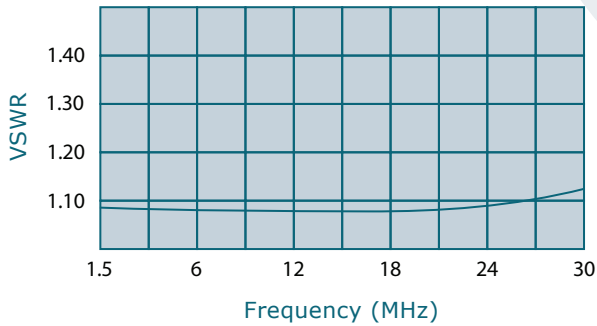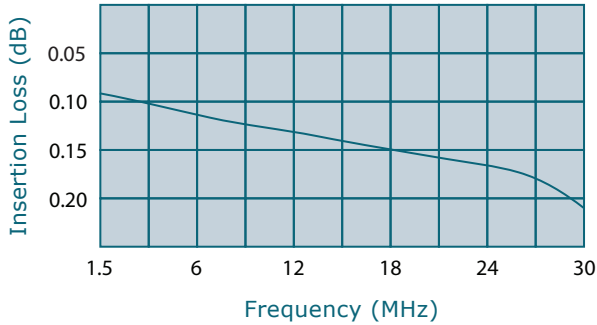

Frequency: 1.5 - 30 MHz

Power: 4,000 W CW

Insertion Loss: 0.25 dB Max.

VSWR: 1.20:1 Max.



Isolation: 25 dB Min.

Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.1 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J5 (Sum Port)	J1-J4 (Inputs/Outputs)
D5807-20	7/16 Female	N Female
D5807-40	SC Female	SC Female
D5807-41	SC Female	N Female

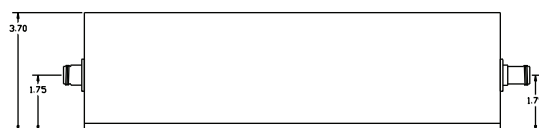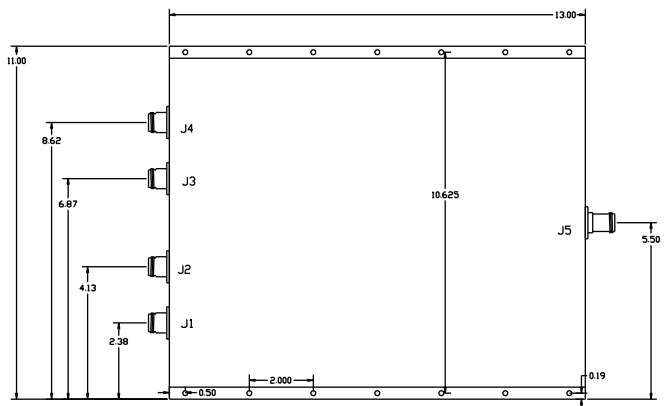

**Subject to change without notice

high power RF devices