



WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com



## 4-Way Combiner/Divider

### Model D6139

Frequency: 1.5 - 32 MHz

Power: 5,000 W CW





Insertion Loss: 0.25 dB Max.

VSWR: 1.25:1 Max.


Isolation: 20 dB Min.

Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.15 dB Max.

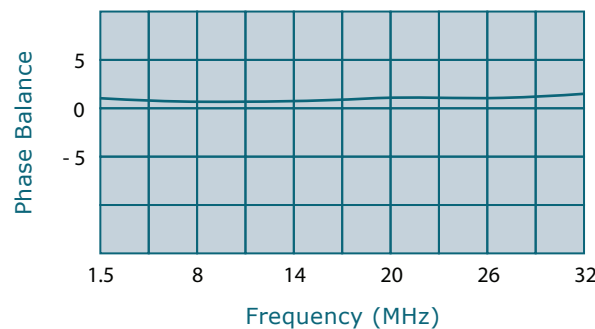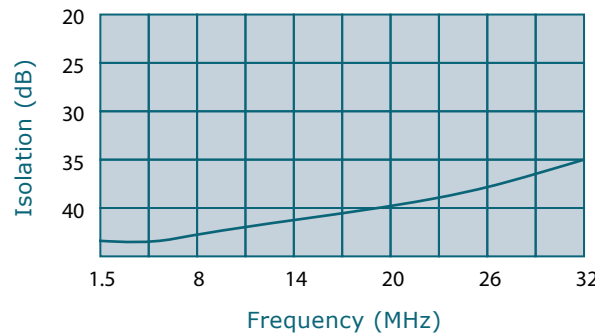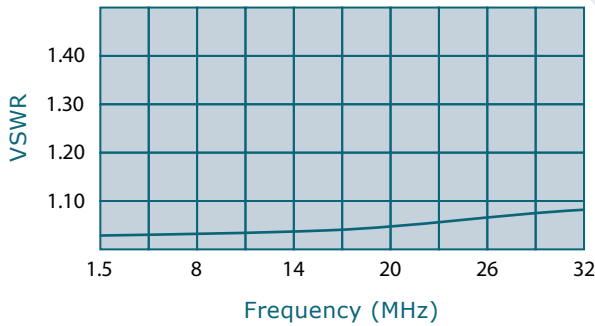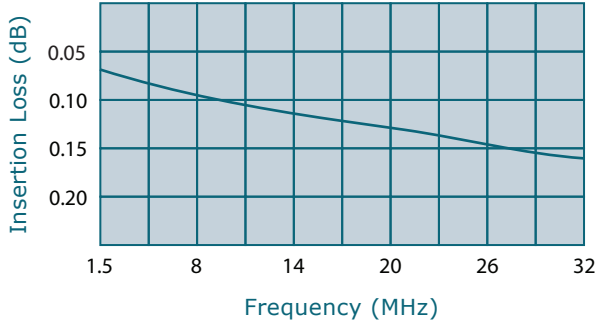

Connector Configuration		
Model	J5 (Sum Port)	J1-J4 (Input/Output)
D6139-20	7/16 Female	N Female
D6139-30	LC Female	N Female
D6139-40	SC Female	SC Female
D6139-41	SC Female	N Female

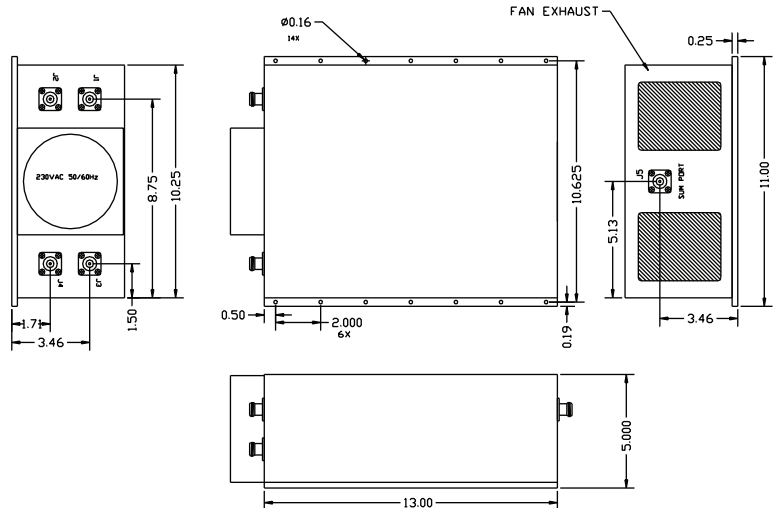

high power RF devices

\*\*Subject to change without notice