




WERLATONE





SINCE 1965

Werlatone, Inc.
 17 Jon Barrett Road
 Patterson, New York 12563
 T 845.278.2220
 F 845.278.3440
 www.werlatone.com

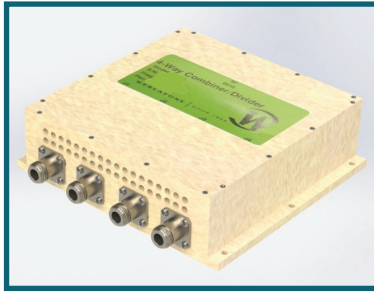

4-Way Combiner/Divider

Model D5612

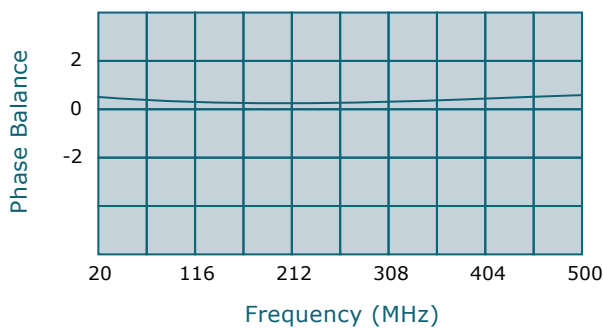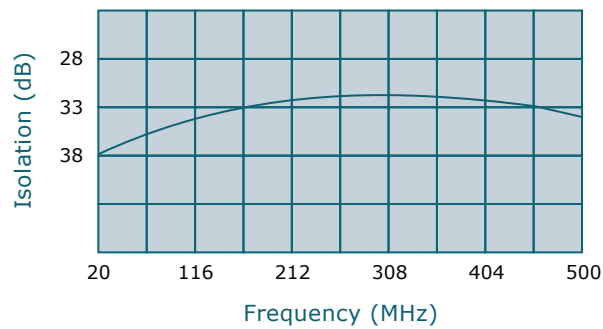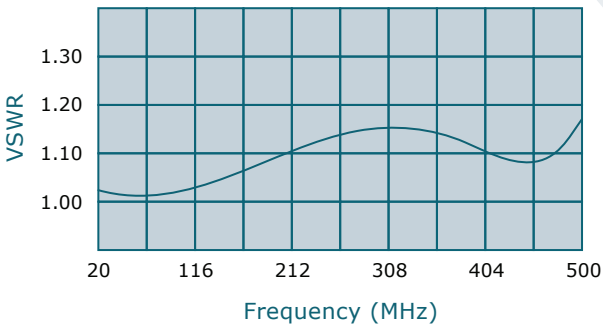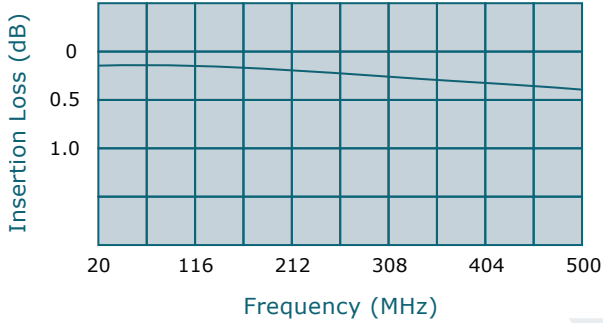

Frequency: 20 - 500 MHz

Power: 500 W CW

Insertion Loss: 0.7 dB Max.

VSWR: 1.40:1 Max.


Isolation: 20 dB Min.

Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.5 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J5 (Sum Port)	J1-J4 (Inputs/Outputs)
D5612-10	N Female	N Female
D5612-12	N Female	SMA
D5612-13	N Female	BNC
D5612-41	SC Female	N Female

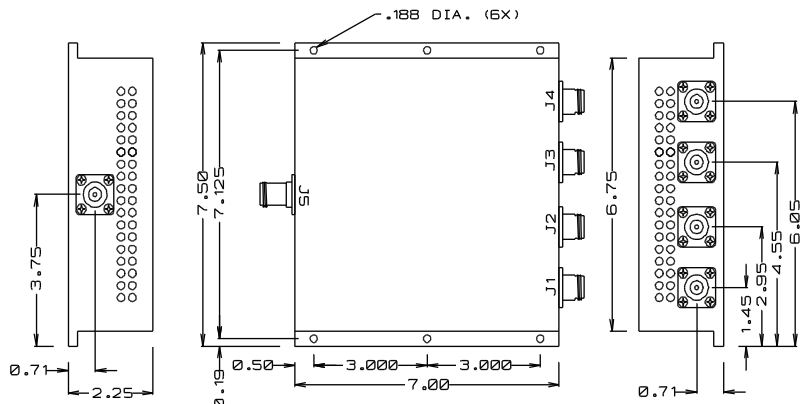

**Subject to change without notice