







WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

4-Way Combiner/Divider

Model D5074

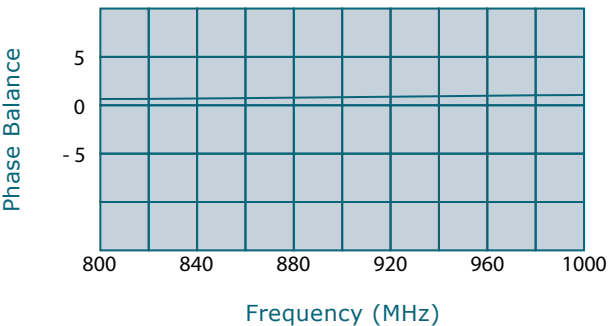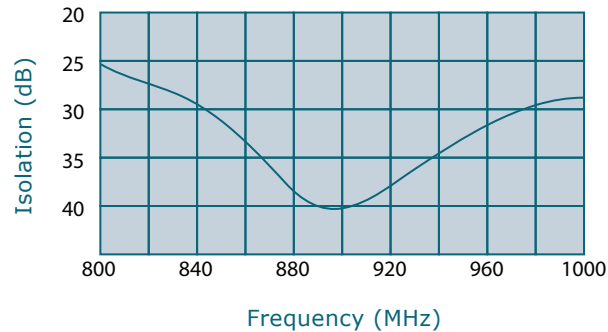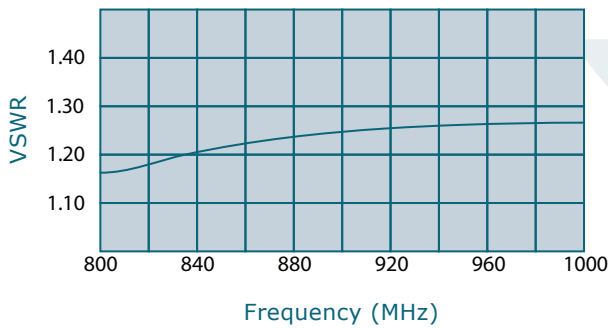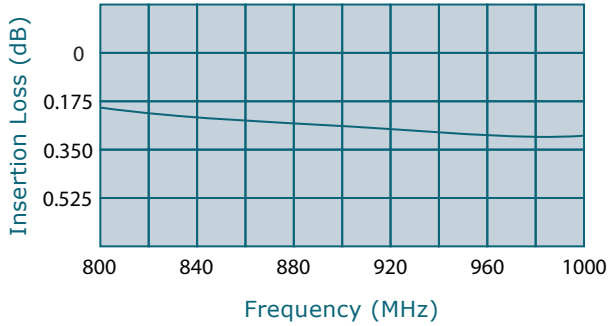

Frequency: 800 - 1000 MHz

Power: 100 W CW

Insertion Loss: 0.35 dB Max.

VSWR: 1.50:1 Max.




Isolation: 18 dB Min.

Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.3 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J5 (Sum Port)	J1-J4 (Inputs/Outputs)
D5074-10	N Female	N Female
D5074-12	N Female	SMA

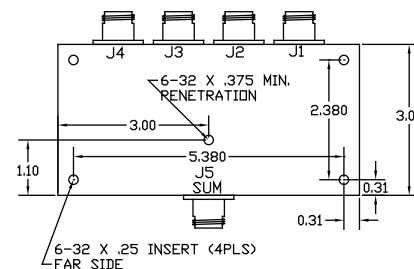

**Subject to change without notice

high power RF devices