



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

4-Way Combiner/Divider

Model D2889

Frequency: 88-108 MHz

Power: 2500 W CW





Insertion Loss: 0.3 dB Max.

VSWR: 1.30:1 Max.



Isolation: 20 dB Min.

Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.2 dB Max.

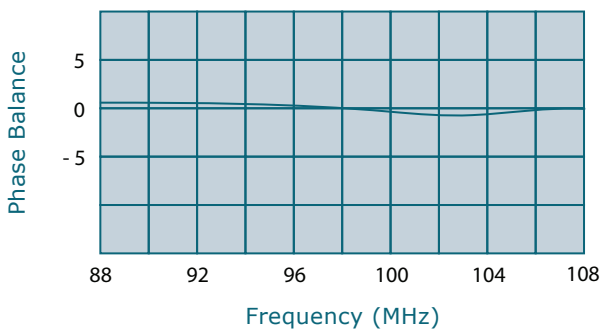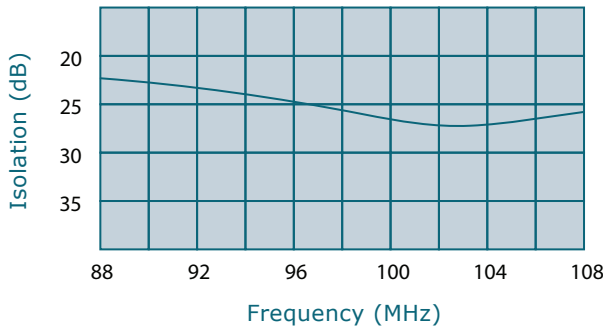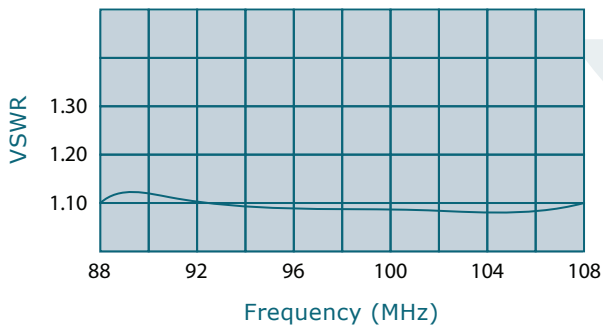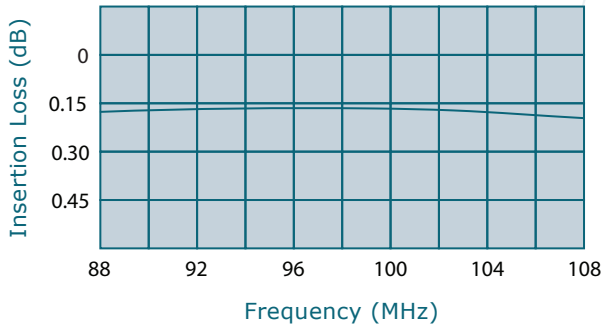

Connector Configurations		
Model	J5 (Sum Port)	J1-J4 (Inputs/Outputs)
D2889-10	N Female	N Female
D2889-20	7/16 Female	N Female
D2889-41	SC Female	N Female

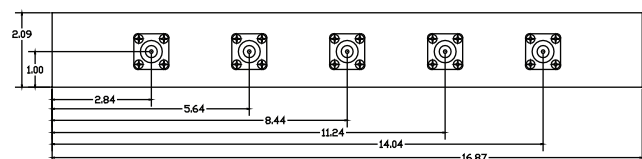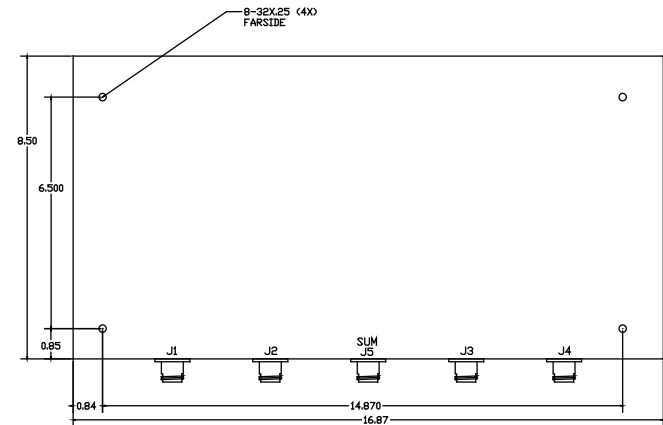

**Subject to change without notice

high power RF devices