



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

4-Way Combiner/Divider

Model D5778

Frequency: 30 - 90 MHz

Power: 5,000 W CW





Insertion Loss: 0.3 dB Max.

VSWR: 1.30:1 Max.

Isolation: 20 dB Min.


Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.2 dB Max.

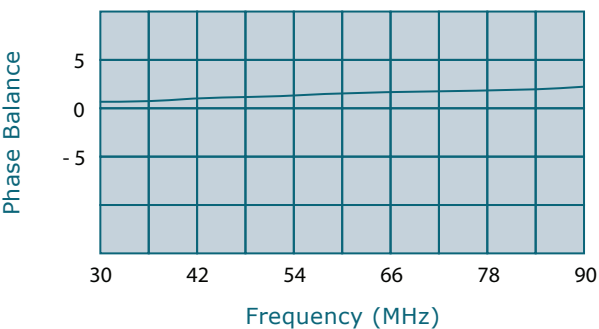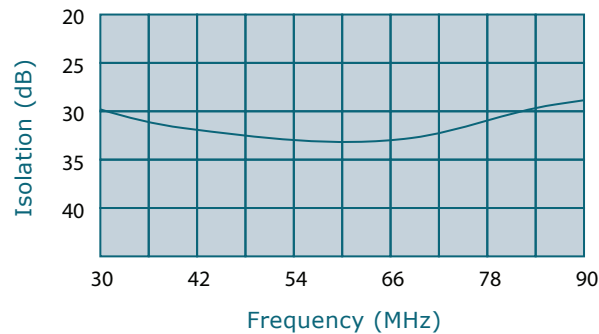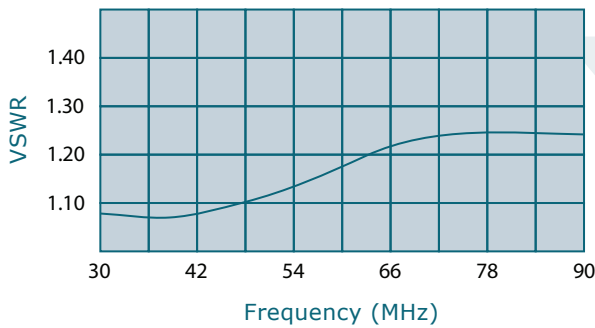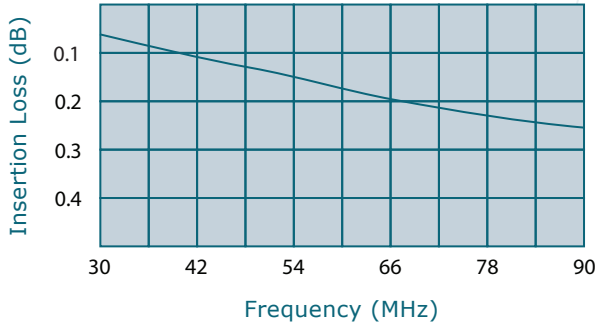

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J5 (Sum Port)	J1-J4 (Inputs/Outputs)
D5778-20	7/16 Female	N Female
D5778-30	LC Female	N Female
D5778-70	7/8 EIA	N Female
D5778-80	1 5/8 EIA	N Female

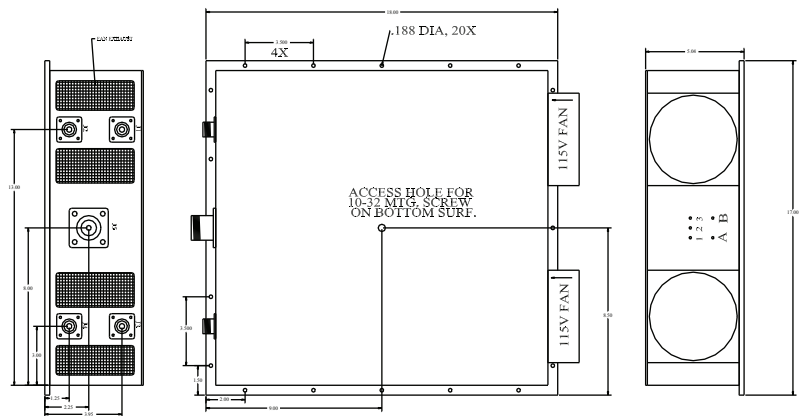

**Subject to change without notice

high power RF devices