




WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



40 dB Dual Directional Coupler

Model C6559

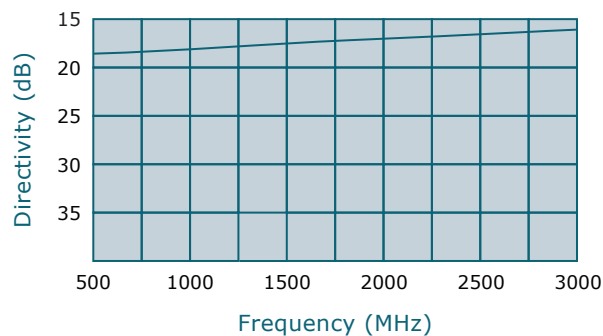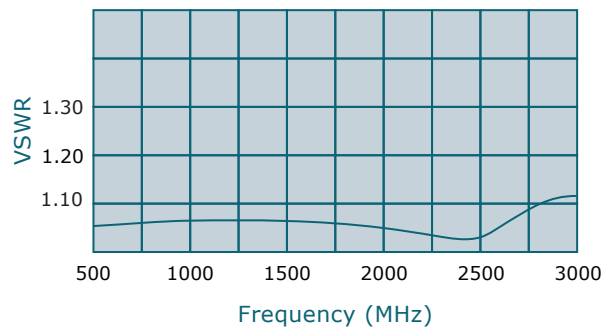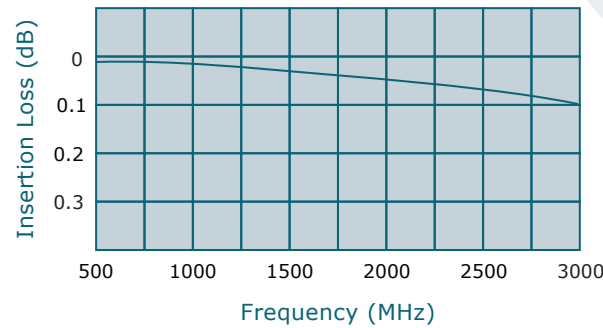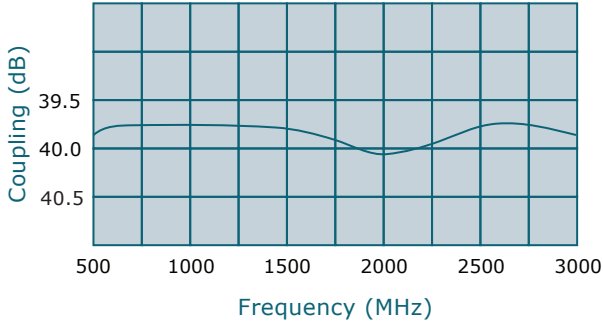

**Subject to change without notice

Frequency: 500 - 3000 MHz

Power: 1000 W CW

Coupling: 40 dB ± 1.0 dB Nom.

Insertion Loss: 0.25 dB Max.


VSWR: 1.30:1 Max.

Flatness: +/- 0.75 dB Max.

Directivity: 15 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- Designed to operate, at 250 W CW, into an infinite VSWR.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C6559-10	N Female	N Female
C6559-12	N Female	SMA
C6559-13	N Female	BNC
C6559-43	SC Female	SMA

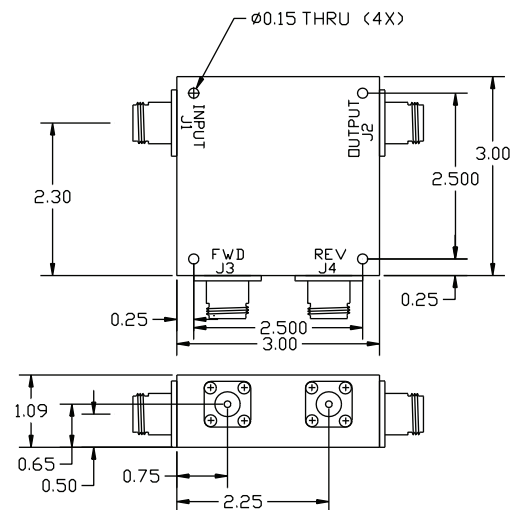

high power RF devices