



WERLATONE





SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com



# 40 dB Dual Directional Coupler

## Model C6473

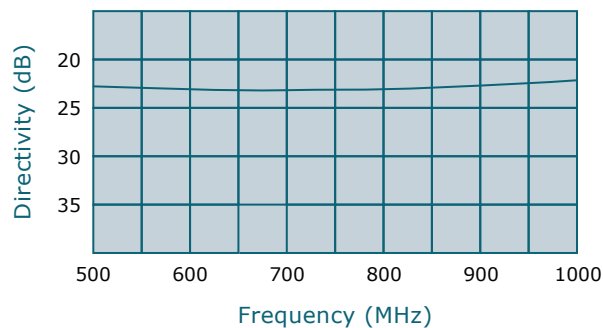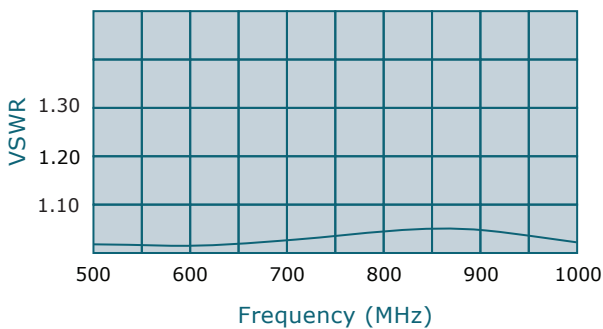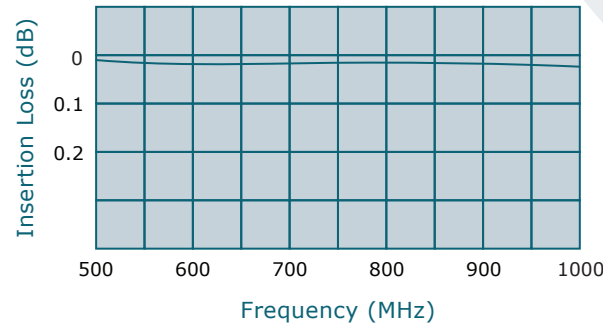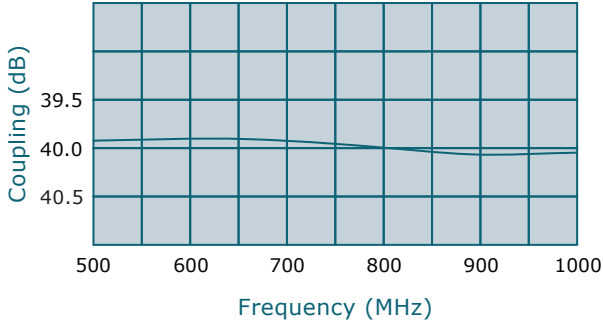

\*\*Subject to change without notice

Frequency: 500 - 1000 MHz

Power: 1500 W CW

Coupling: 40 dB ± 1.0 dB Nom.

Insertion Loss: 0.2 dB Max.


VSWR: 1.15:1 Max.

Flatness: +/- 0.25 dB Max.

Directivity: 20 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- \* Designed to operate, at rated power, into a 3:1 Load VSWR.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C6473-10	N Female	N Female
C6473-12	N Female	SMA
C6473-13	N Female	BNC
C6473-43	SC Female	SMA

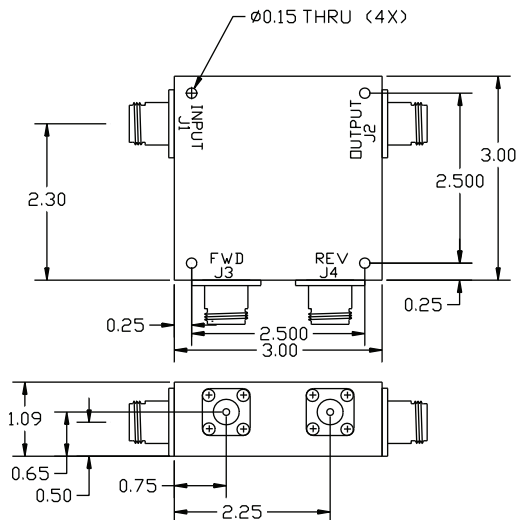

high power RF devices