



WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



50 dB Dual Directional Coupler

Model C6461

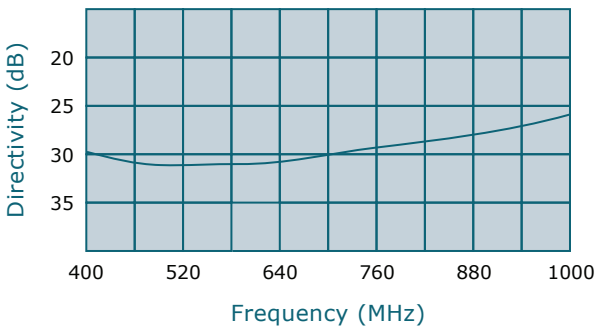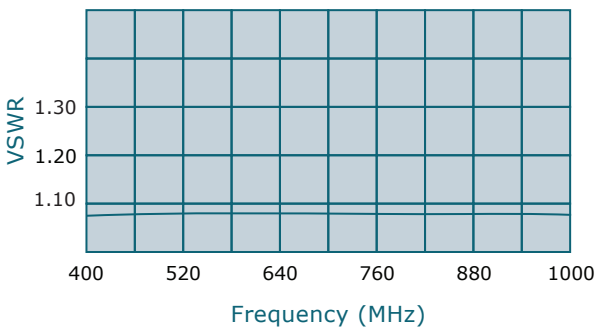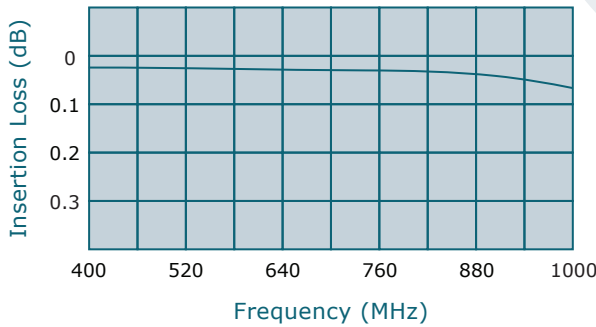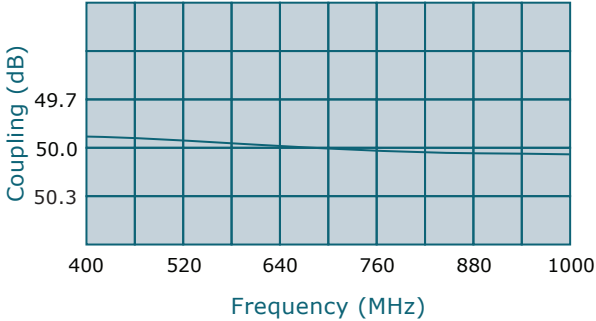

Frequency: 400-1000 MHz

Power: 1,500 W CW

Coupling: 50 dB ± 1.0 dB Nom.

Insertion Loss: 0.1 dB Max.

VSWR: 1.10:1 Max.


Flatness: +/- 0.3 dB Max.

Directivity: 23 dB Min.

*Mismatch Tolerant® Design

- All specifications guaranteed.
 - Test data provided with each unit shipped.
 - Uni-Directional version available.
- * Designed to operate, at rated power, into an infinite VSWR.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C6461-10	N Female	N Female
C6461-12	N Female	SMA
C6461-13	N Female	BNC
C6461-43	SC Female	SMA

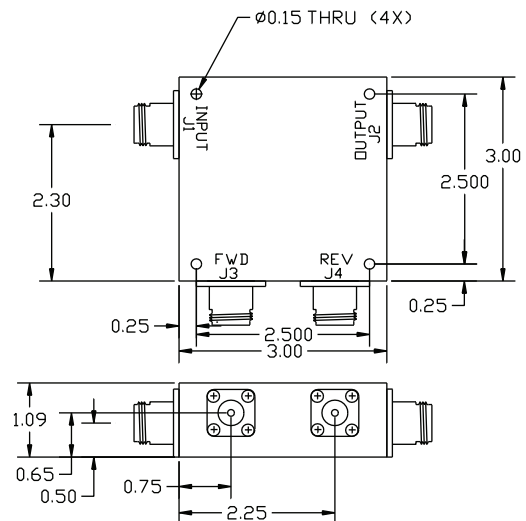

**Subject to change without notice

high power RF devices