




WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

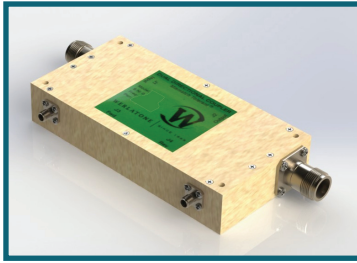

50 dB Dual Directional Coupler

Model C6217

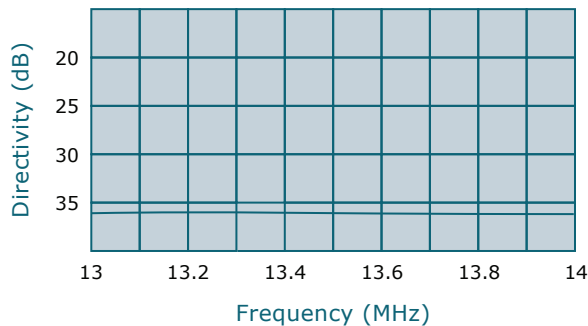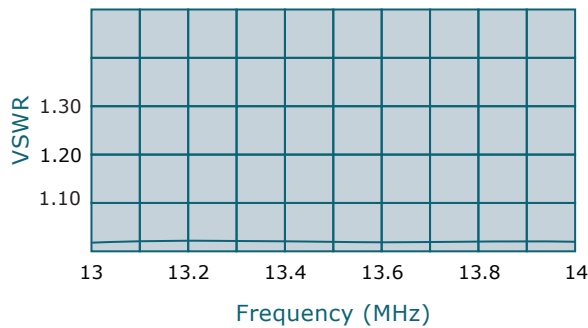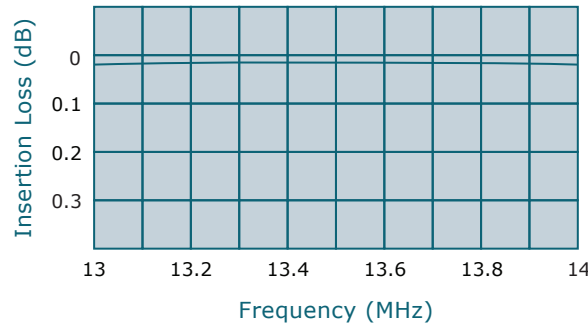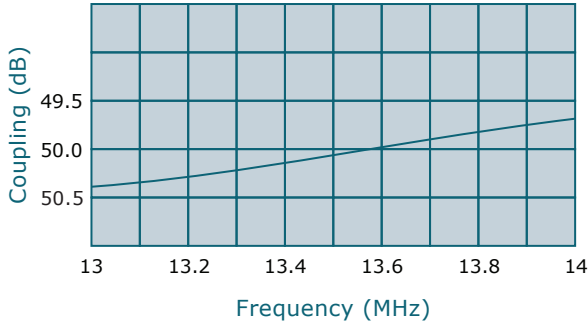

Frequency: 13-14 MHz

Power: 3,000 W CW

Coupling: 50 dB ± 1.0 dB Nom.

Insertion Loss: 0.05 dB Max.


VSWR: 1.05:1 Max.

Flatness: +/-0.5 dB Max.**

Directivity: 30 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- ** Flatness +/- 0.1 dB at center frequency of 13.56 MHz.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C6217-10	N Female	N Female
C6217-12	N Female	SMA
C6217-13	N Female	BNC
C6217-22	7/16 Female	SMA

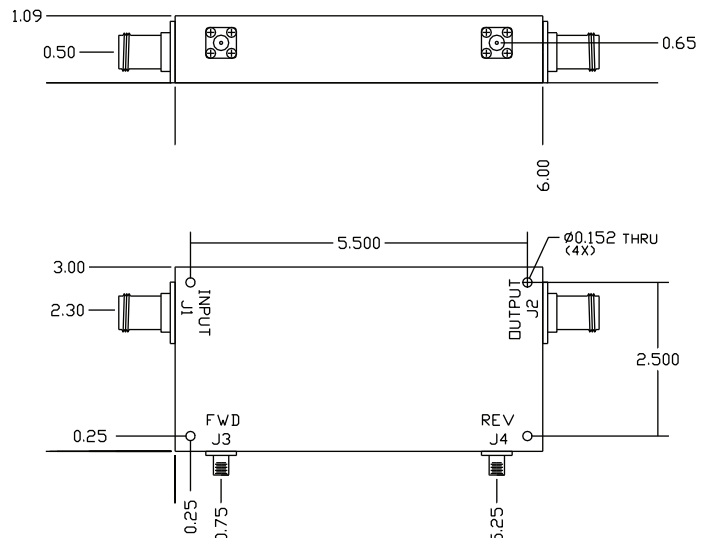

**Subject to change without notice

high power RF devices