



WERLATONE





SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



60 dB Dual Directional Coupler

Model C5044

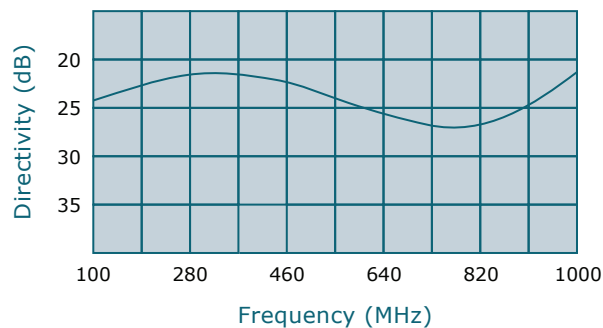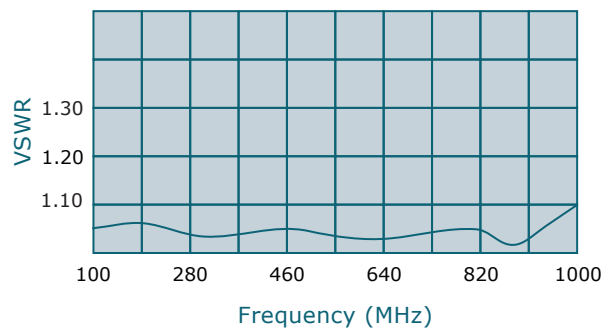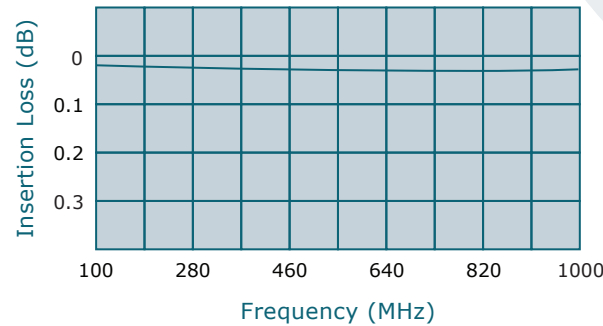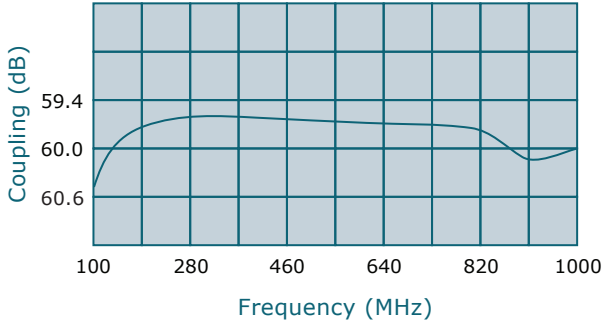


**Subject to change without notice

- Frequency: 100 - 1000 MHz
- Power: 2,000 W CW
- Coupling: 60 dB ± 1.0 dB Nom.
- Insertion Loss: 0.15 dB Max.
- VSWR: 1.20:1 Max.
- Flatness: +/- 0.6 dB Max.
- Directivity: 20 dB Min.

*Mismatch Tolerant® Design

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- * Designed to operate, at rated power, into an infinite VSWR.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C5044-10	N Female	N Female
C5044-12	N Female	SMA
C5044-13	N Female	BNC
C5044-43	SC Female	SMA

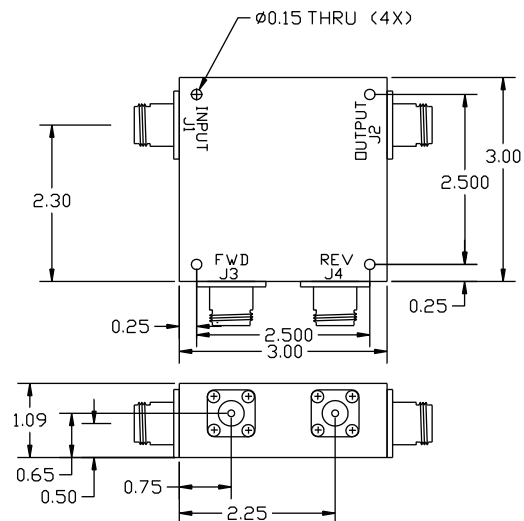

high power RF devices