



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

2-Way(90 Deg.)Combiner

Model QH6651

Frequency: 225-410 MHz

Power: 1200 W CW





Insertion Loss: 0.2 dB Max.

VSWR: 1.3:1 Max.

Isolation: 20 dB Min.


Phase Balance: 5 Deg. Max.

Amplitude Balance: +/-0.5 dB Max.

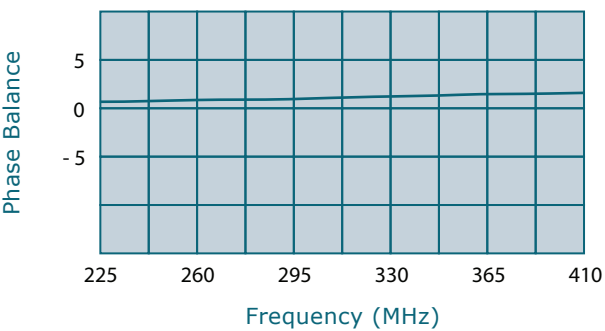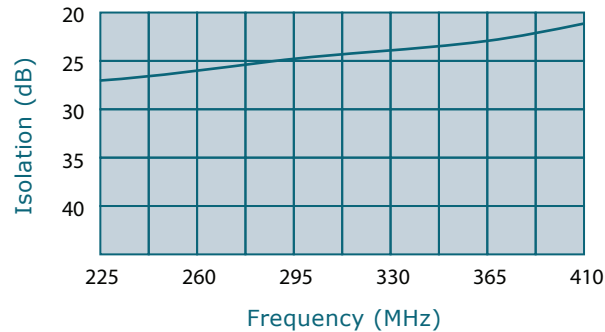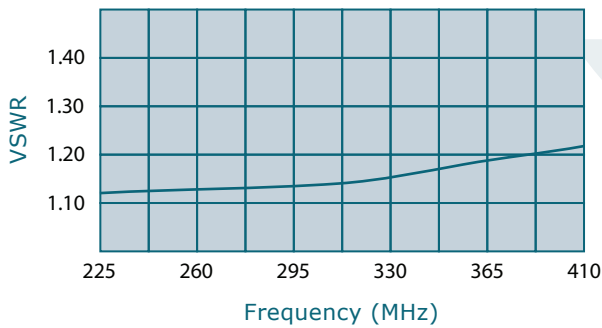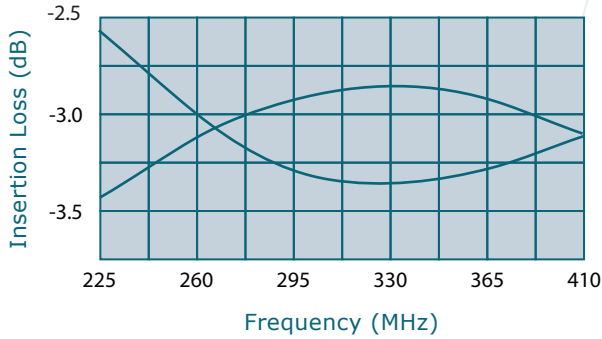

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Model	Connectors	
	<u>J1</u>	<u>J2-J3-J4</u>
QH6651-10	N Female	N Female
QH6651-12	N Female	SMA
QH6651-13	N Female	BNC

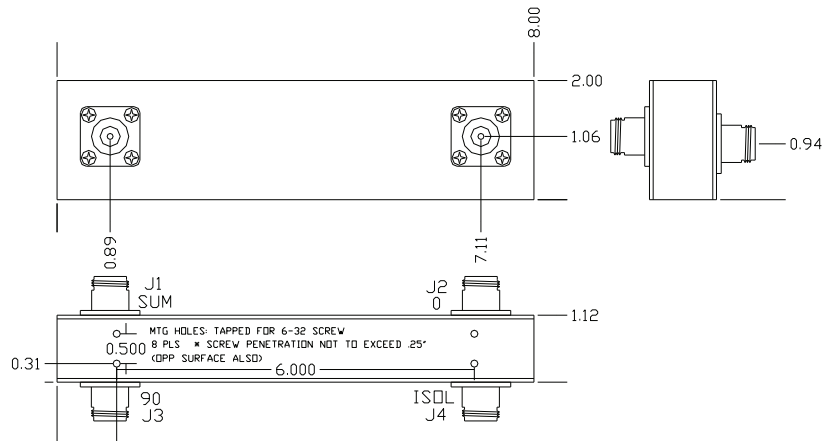

high power RF devices