WERLATONE | SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

30 dB Dual Directional Coupler

Model C6762

Frequency:	470-860 MHz
Power:	250 W CW
Coupling:	30 dB ± 1.0 dB Nom.
Insertion Loss:	0.2 dB Max.
VSWR:	1.20:1 Max.
Flatness:	+/- 0.5 dB Max.
Directivity:	20 dB Min.

*Mismatch Tolerant® Design

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

* Designed to operate, at rated power, into an infinite VSWR.

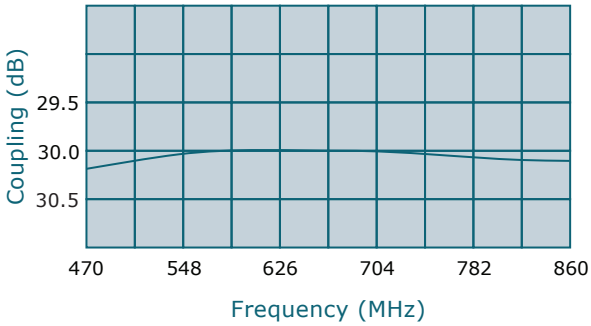

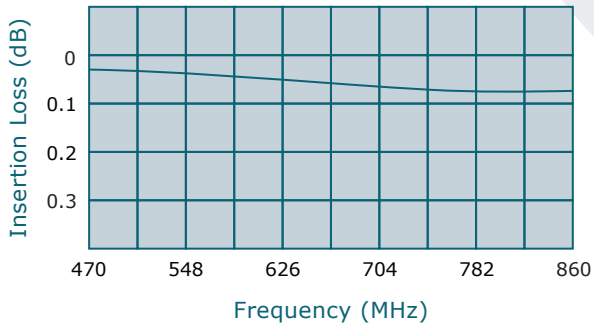

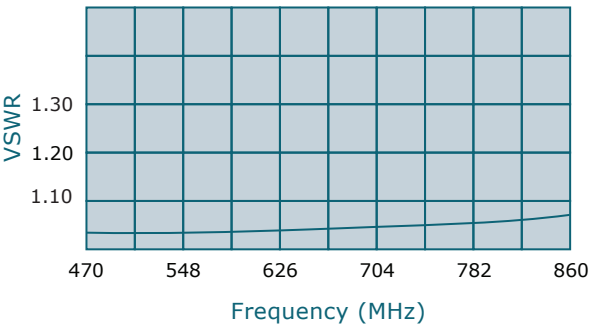

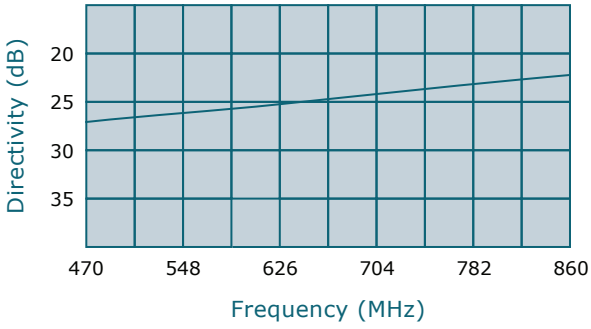

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C6762-10	N Female	N Female
C6762-12	N Female	SMA
C6762-13	N Female	BNC
C6762-22	7/16 Female	SMA

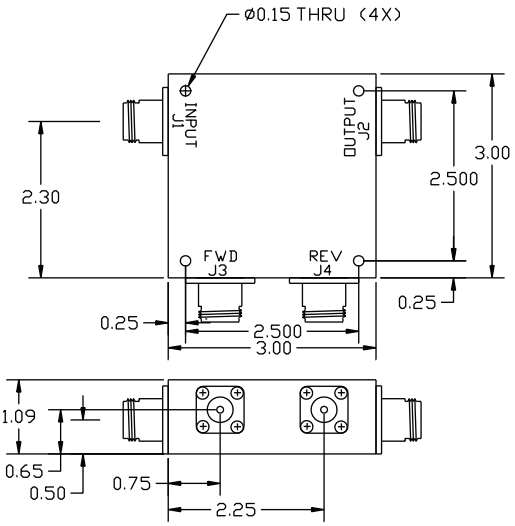

high power RF devices

**Subject to change without notice