




WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

30 dB Dual Directional Coupler

Model C5948

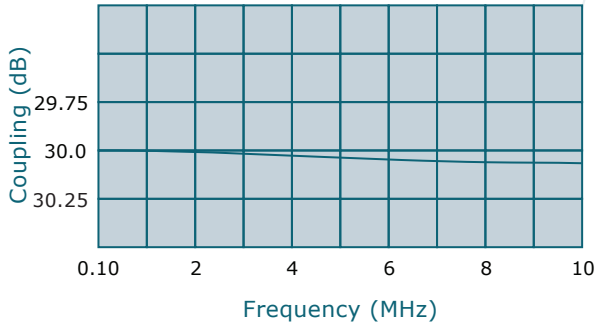

Frequency: 0.1-10 MHz

Power: 1500 W CW



Coupling: 30 dB ± 1.0 dB Nom.

Insertion Loss: 0.1 dB Max.

VSWR: 1.05:1 Max.
1.25:1 Max.




Flatness: +/-0.25 dB Max.

Directivity: 25 dB Min.

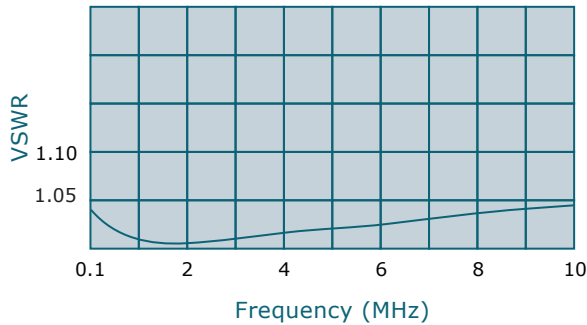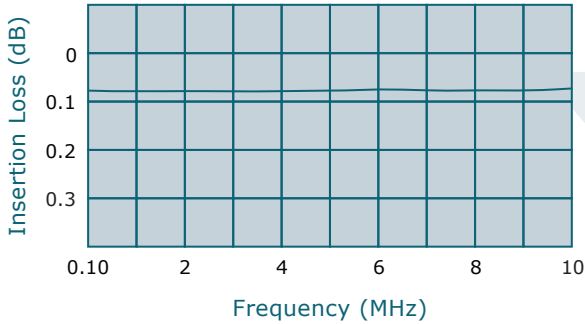

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C5948-10	N Female	N Female
C5948-12	N Female	SMA
C5948-13	N Female	BNC
C5948-43	SC Female	SMA

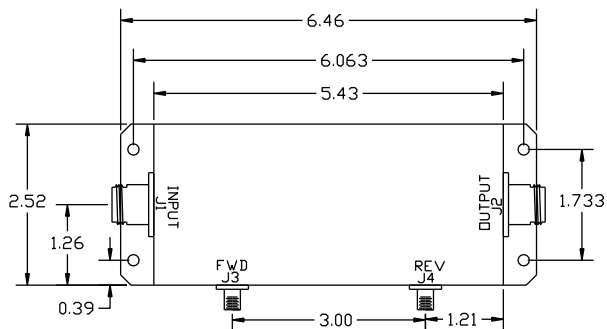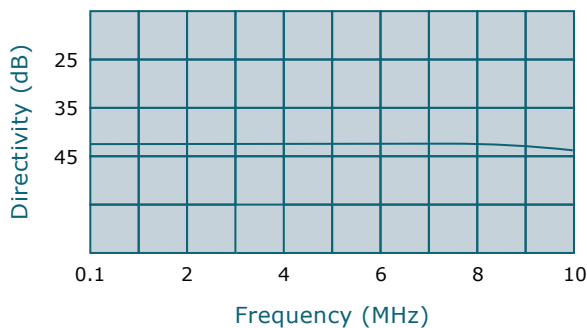

**Subject to change without notice