




WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

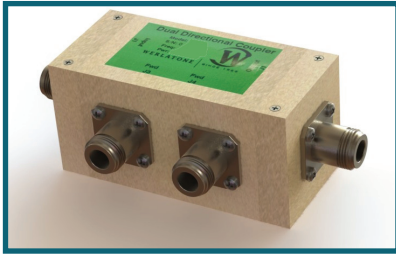

30 dB Dual Directional Coupler

Model C1569

Frequency: 20-200 MHz

Power: 250 W CW

Insertion Loss: 0.25 dB Max.





Coupling: 30 dB \pm 1.0 dB Nom.

VSWR: 1.10:1 Max.

Flatness: \pm 0.50 dB Max.


Directivity: 20 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.

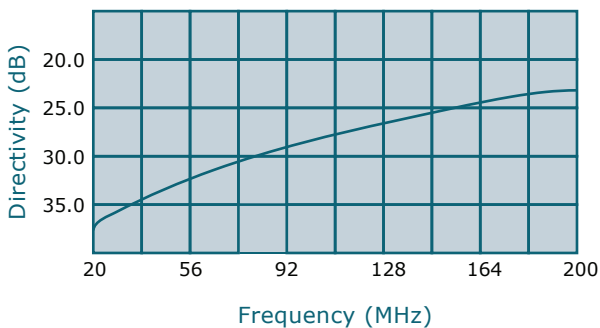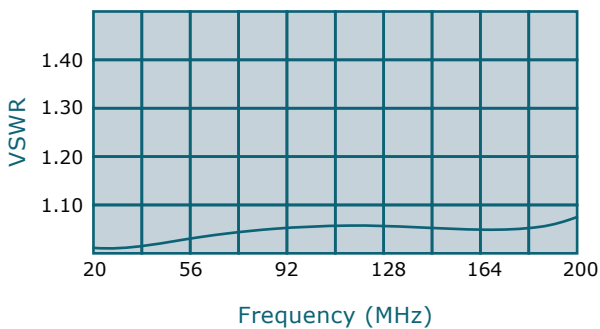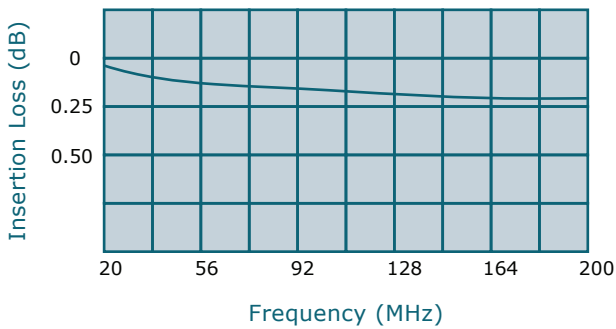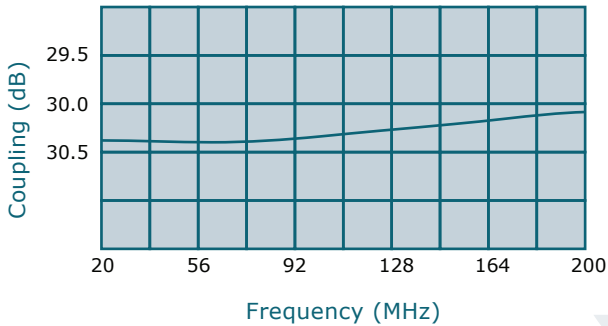

**Subject to change without notice

Connector Configuration		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Ports)
C1569-10	N Female	N Female
C1569-12	N Female	SMA
C1569-13	N Female	BNC
C1569-102	SMA	SMA

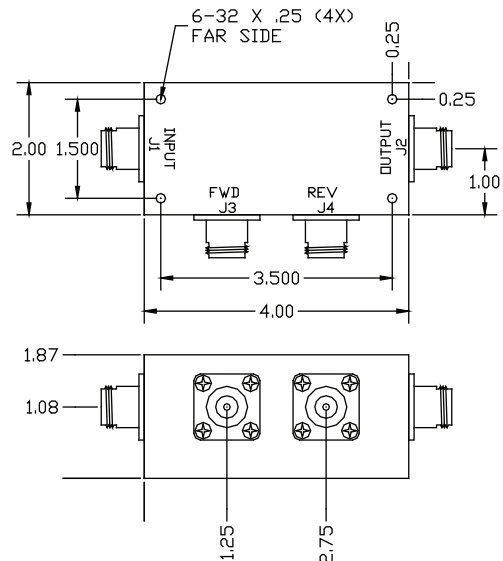

high power RF devices