

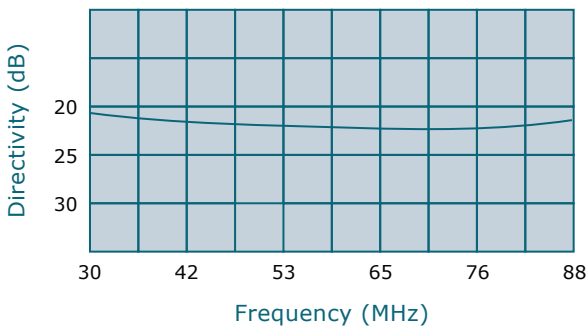
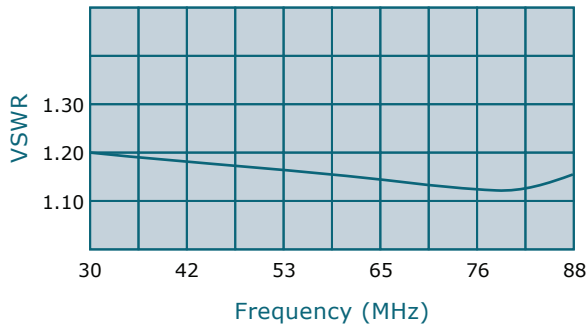


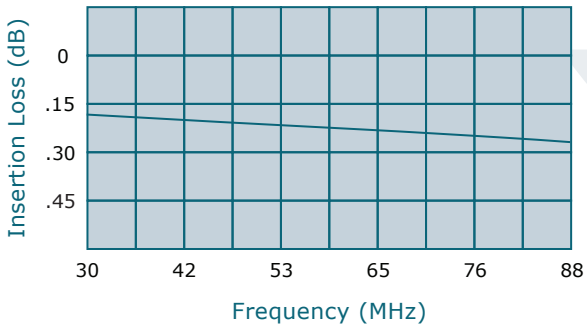

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

6 dB Uni Directional Coupler

Model C5011

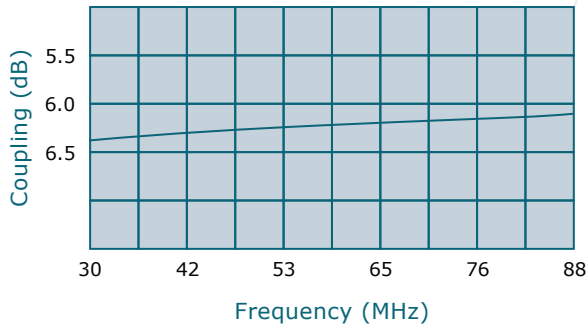

Frequency: 30-88 MHz

Power: 100 W CW

Coupling: 6 dB ± 1.0 dB Nom.

Insertion Loss: 0.3 dB Max.



VSWR: 1.30:1 Max.

Flatness: +/- 0.5 dB Max.

Directivity: 20 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Designed to operate, at rated power, into an infinite VSWR.

Connector Configurations			
Model	J1 (Input)	J2 (Output)	J3 (Fwd Port)
C5011-10	N Female	N Female	N Female
C5011-12	N Female	N Female	SMA
C5011-102	SMA	SMA	SMA

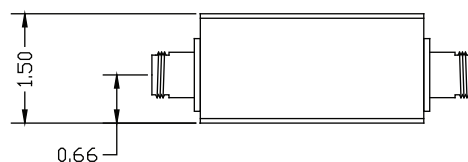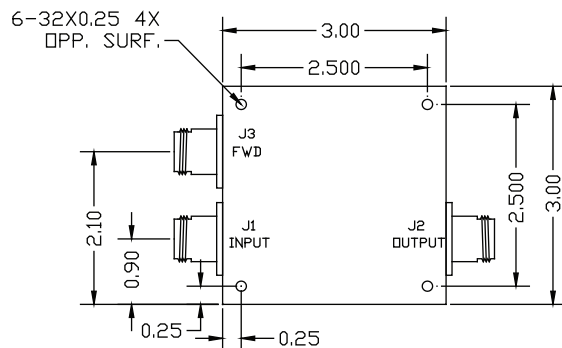

**Subject to change without notice