



WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

# 10 dB Bi-Directional Coupler

## Model C7058

Frequency: 200-2000 MHz

Power: 200 W CW





Coupling: 10 dB ± 1.0 dB Nom.

Insertion Loss: 0.3 dB Max.\*

VSWR: 1.25:1 Max.



Flatness: +/- 1.0 dB Max.

Directivity: 20 dB Min.

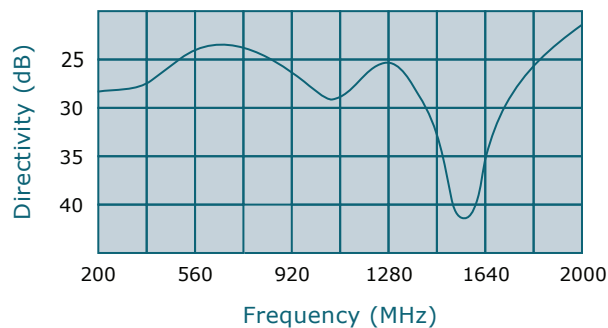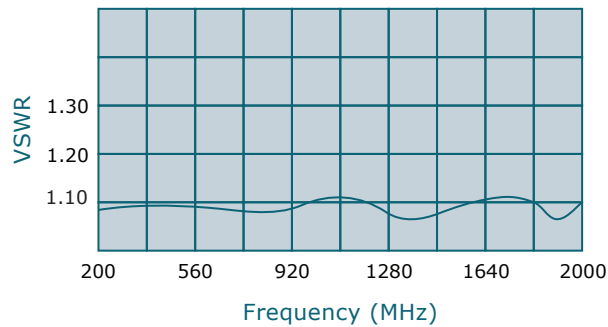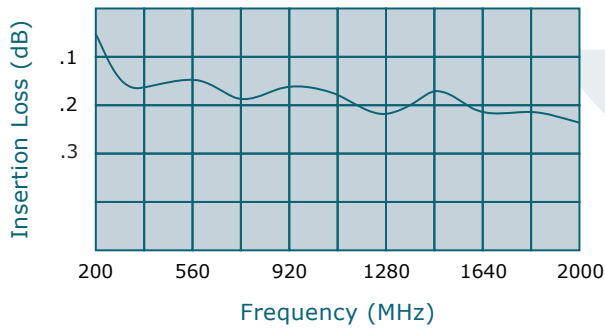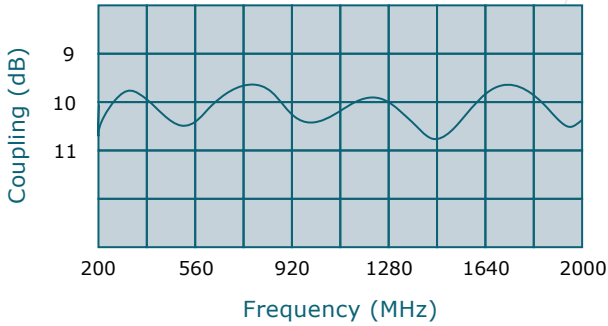

- \* Does not include Theoretical Coupling Loss.
- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C7058-10	N Female	N Female
C7058-12	N Female	SMA
C7058-102	SMA	SMA

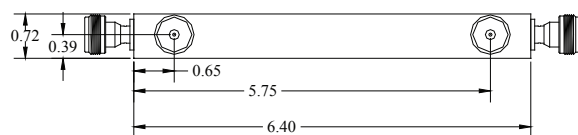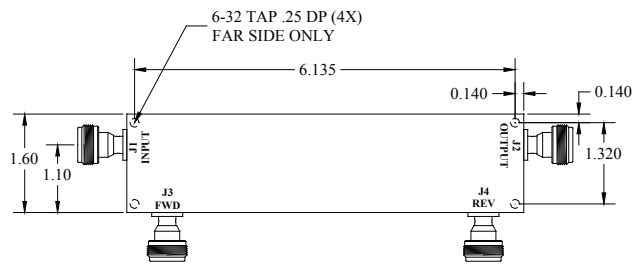

\*\*Subject to change without notice