



WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

## 20dB Bi-Directional Coupler

### Model C7127

Frequency: 100-1000 MHz

Power: 200 W CW





Coupling: 20 dB ± 1.0 dB Nom.

Insertion Loss: 0.2 dB Max.

VSWR: 1.20:1 Max.


Flatness: +/- 1.0 dB Max.

Directivity: 20 dB Min.

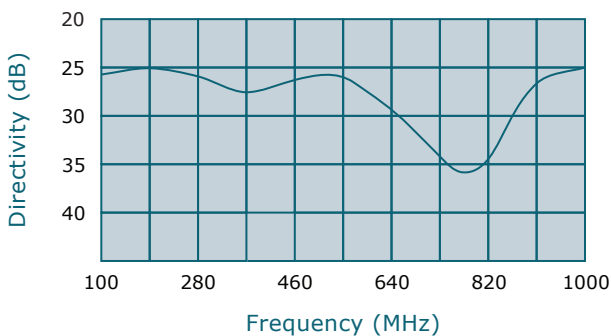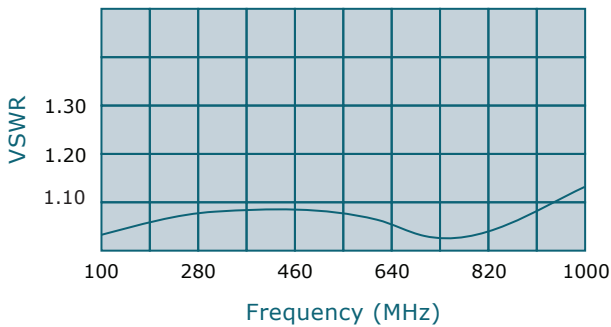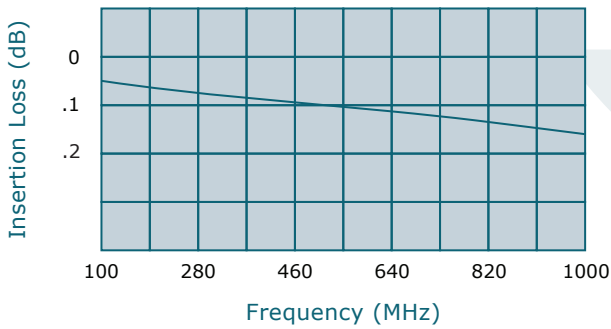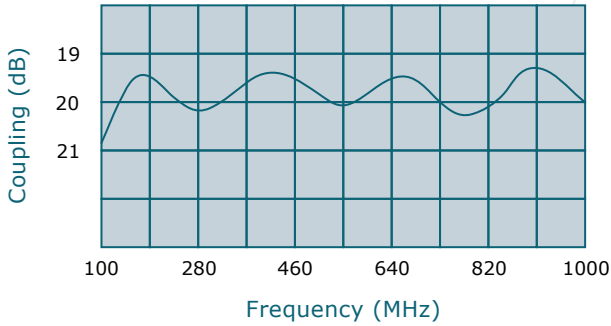

- All specifications guaranteed.
- Test data provided with each unit shipped.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C7127-10	N Female	N Female
C7127-12	N Female	SMA
C7127-102	SMA	SMA

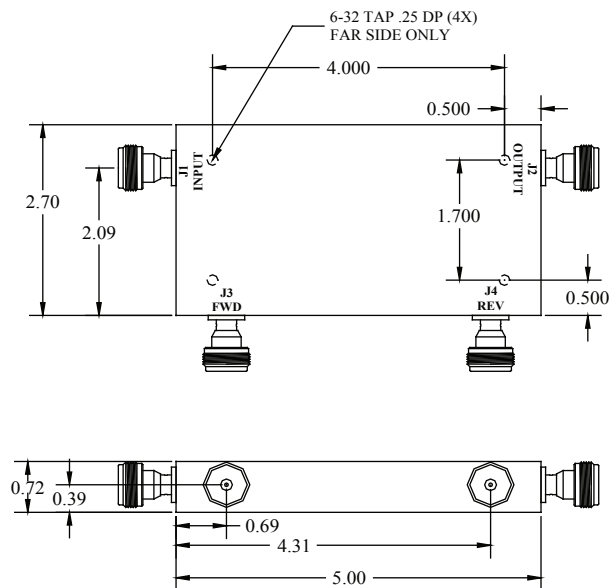

\*\*Subject to change without notice

high power RF devices