



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

20 dB Uni Directional Coupler

Model C5562

Frequency: 1-500 MHz

Power: 30 W CW





Coupling: 20 dB ± 1.0 dB Nom.

Insertion Loss: 1.2 dB Max.

VSWR: 1.20:1 Max.



Flatness: +/- 1.0 dB Max.

Directivity: 20 dB Min.

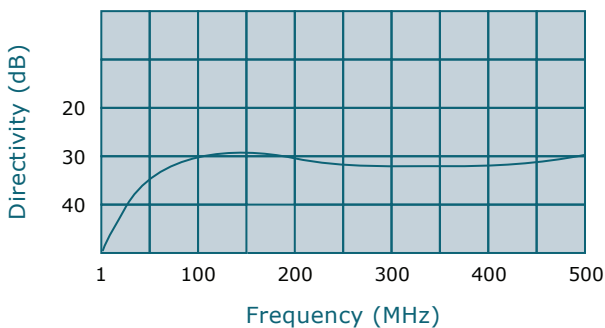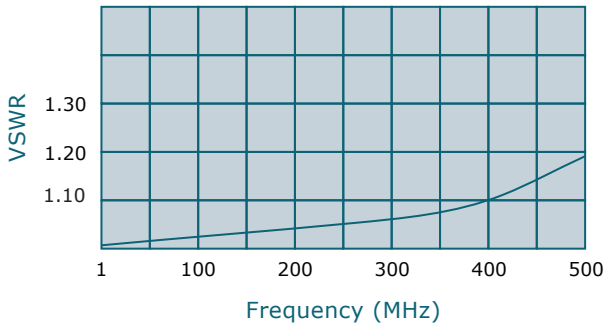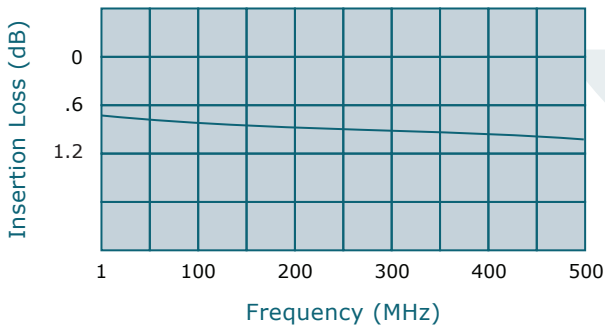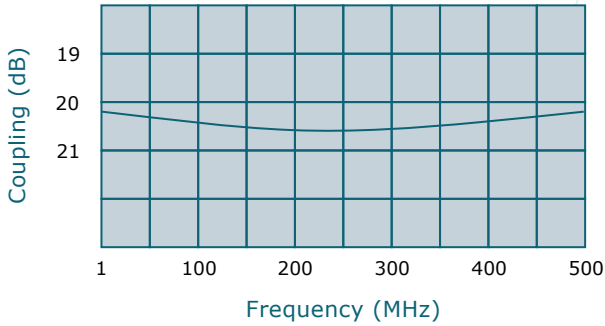

- All specifications guaranteed.
- Test data provided with each unit shipped.

Connector Configurations			
Model	J1 (Sum Port)	J2 (Output)	J3 (Fwd Port)
C5562-10	N Female	N Female	N Female
C5562-12	N Female	SMA	SMA
C5562-13	N Female	BNC	BNC
C5562-102	SMA	SMA	SMA

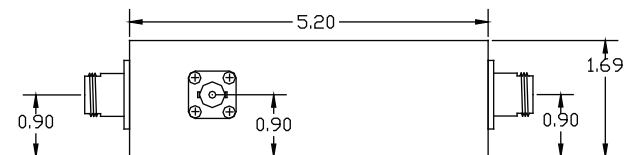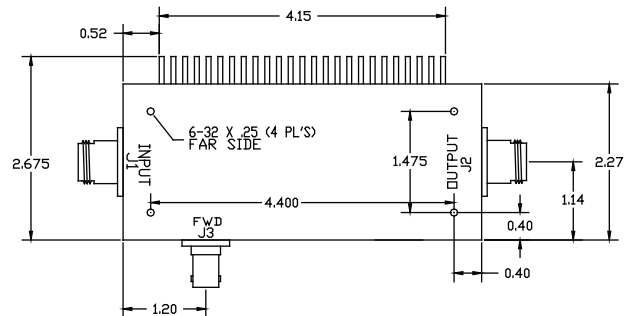

**Subject to change without notice