



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

3-Way Combiner/Divider

Model D7070

Frequency: 30 - 500 MHz

Power: 100 W CW





Insertion Loss: 0.75 dB Max.

VSWR: 1.35:1 Max.

Isolation: 20 dB Min.


Phase Balance: $\pm 5^\circ$ Max.

Amplitude Balance: 0.3 dB Max.

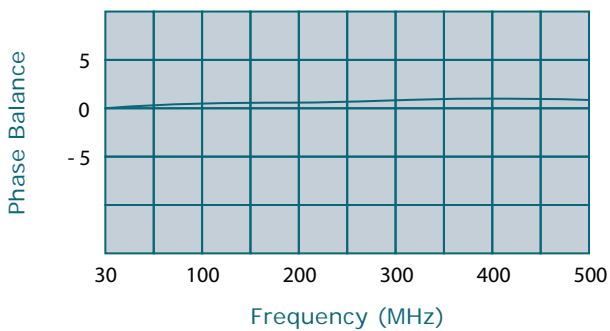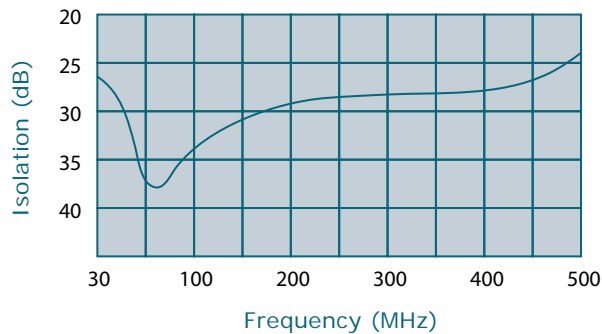
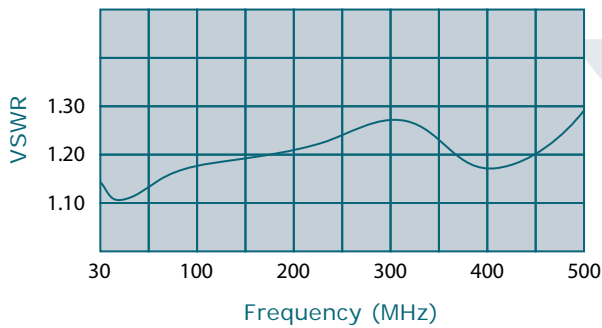
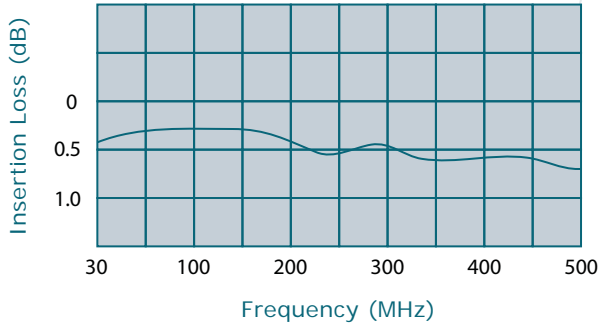


- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J1 (Sum Port)	J2-J4 (Inputs/Outputs)
D7070-10	N Female	N Female
D7070-12	N Female	SMA
D7070-13	N Female	BNC
D7070-102*	SMA	SMA

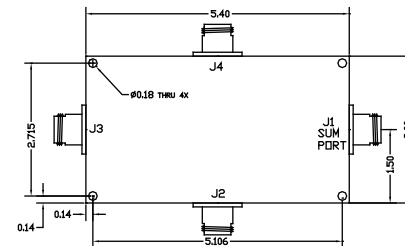

(*) Note location of SMA connectors for "-102" connector configuration.

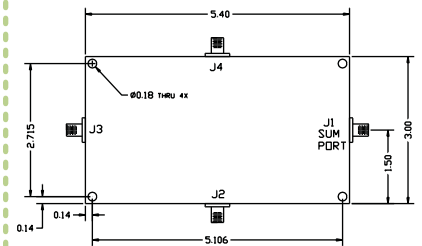

**Subject to change without notice

high power RF devices