







WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

2-Way 180° Combiner/Divider

Model H6289

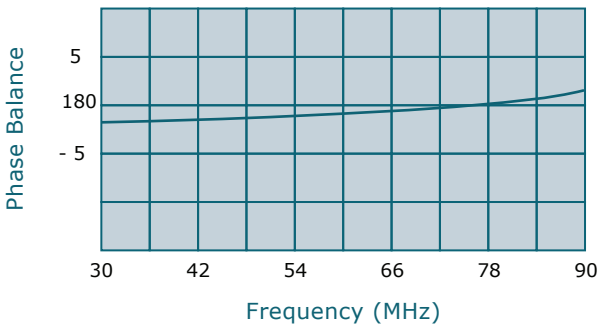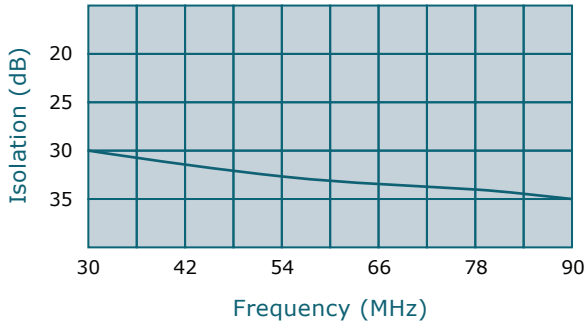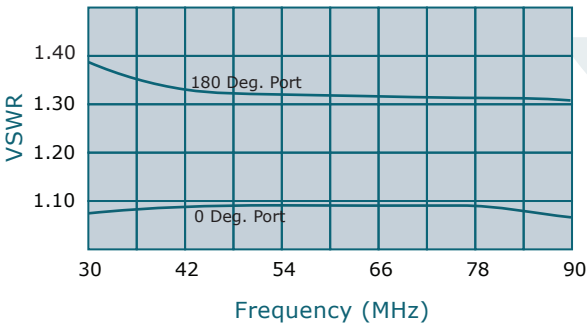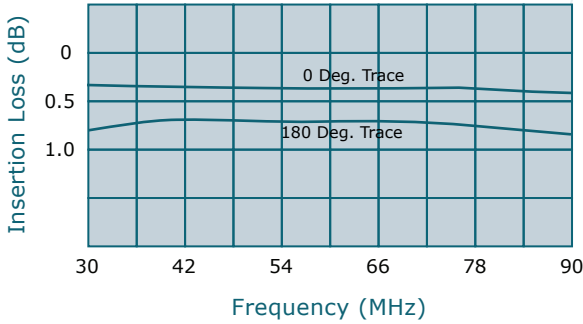

Frequency: 30 - 90 MHz

Power: 50 W CW

Insertion Loss: 0.8 dB Max.

VSWR: 1.40:1 Max.


Isolation: 25 dB Min.

Phase Balance: $180^\circ \pm 5^\circ$ Max.

Amplitude Balance: 0.4 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J1 (Sumport)	J2,J3 (Inputs/Outputs)
H6289-10	N Female	N Female
H6289-12	N Female	SMA
H6289-13	N Female	BNC
H6289-102	SMA	SMA

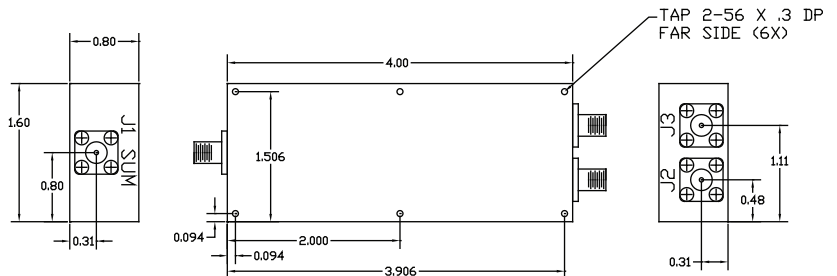

high power RF devices

**Subject to change without notice